

## LB PLUS trunking components




75201003



75161001



75201004

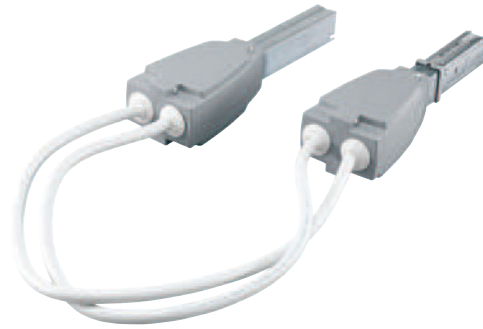

75221263



Selection chart **p. 6-7**

Technical data **p. 12-13**

Dimensions and technical information **p. 16-17**

Pack	Cat. Nos.	End feed units	
		Allow electrical powering of the LB PLUS busbar With terminals for the connection of stranded or solid copper wire cables Delivered with corresponding cable glands	
		<b>Right hand feed units (reduced dimensions)</b>	
		Supplied complete with corresponding end cover Cable terminal capacity 6 mm <sup>2</sup> to 25 mm <sup>2</sup> Max. cable Ø 32 mm	
		Type	Weight (kg)
1	75201003	25 / 40 A – 2 / 4 conductor version	0·80
1	75221003	25 / 40 A – 6 / 8 conductor version	0·90
1	75241003	63 A – 4 conductor version	0·80
		<b>Left hand feed units (reduced dimensions)</b>	
		Supplied complete with corresponding end cover Cable terminal capacity 6 mm <sup>2</sup> to 25 mm <sup>2</sup> Max. cable Ø 32 mm	
		Type	Weight (kg)
1	75201004	25 / 40 A – 2 / 4 conductor version	1·00
1	75221004	25 / 40 A – 6 / 8 conductor version	1·20
1	75241004	63 A – 4 conductor version	1·10
		<b>Fast fit feed unit</b>	
		Supplied complete with corresponding end cover Cable terminal capacity up to 6 mm <sup>2</sup> Cable Ø from 12 mm to 18 mm	
		Type	Weight (kg)
1	75161001	25 A – 2 / 4 conductor version RH	0·45
1	75161002	25 A – 2 / 4 conductor version LH	0·85

Pack	Cat. Nos.	Centre feed units	
		Centre feed units can be used to power the busbar from an intermediate point of the line, reducing the voltage drop at the end of the line and/or facilitating the installation when the power supply point is near the centre of the line Complete with all internal wiring One set of terminals feeds both left hand and right hand feed sections Supplied with both end caps	
		Type	Weight (kg)
1	75201151	25 / 40 A – 2 / 4 conductor version	3·70
1	75221151	25 / 40 A – 6 / 8 conductor version	4·40
1	75241151	63 A – 4 conductor version	2·70
		<b>Flexible joints (reduced dimensions)</b>	
		Consists of a right hand and left hand unit Used to change direction, change level or overcome obstructions Flexible cable length : 940 mm	
		Type	Weight (kg)
1	75201263	25 / 40 A – 2 / 4 conductor version	2·00
1	75221263	25 / 40 A – 6 / 8 conductor version	3·10
1	75241263	63 A – 4 conductor version	2·50