

Digital Mixer Amplifier with Multimedia Player 120W



Mixer Amplifier

DESCRIPTION

The NVS-90300121MA is a multi-functional Mixer Amplifier incorporated with the functions of USB flash disk, FM and Bluetooth. It support 70V/100V constant voltage output and 4-16Ω constant resistance speaker output. It is equipped with 3 Mic, 2 AUX, 2 EMC for audio input and with SIREN short circuit trigger function, which can be remotely controlled by this machine or controlled by other devices, with independent alarm output. It is an ideal choice for class rooms, factories and restaurants.


FEATURES

- ⊙ User-friendly and easy to use
- ⊙ Built-in Bluetooth, FM and USB function
- ⊙ Segment code tube screen and intuitive display
- ⊙ Controlled by the infrared remote controller
- ⊙ Equipped with master volume control
- ⊙ SIREN short circuit trigger function
- ⊙ MUTE short circuit trigger function
- ⊙ Equipped with power-off memory function

Specifications	
Model	NVS-90300121MA
Rated Power	120W
Frequency Response	Mic: 120Hz-12kHz (±3dB) Line: 80Hz-15kHz (±3dB)
Sensitivity	Mic:10mV±1mV Line:350mV±50mV
Total Harmonic Distortion	<1%
Speaker Output	70V/100V, 4-16Ω
Tone Adjustments	Treble: 10dB (±2) Bass: 10dB (±2)
Power Supply	AC110-240V 50/60Hz
Weight	4.6kg
Dimension	430×280×88mm


Digital Mixer Amplifier with Multimedia Player 120W

FRONT PANEL

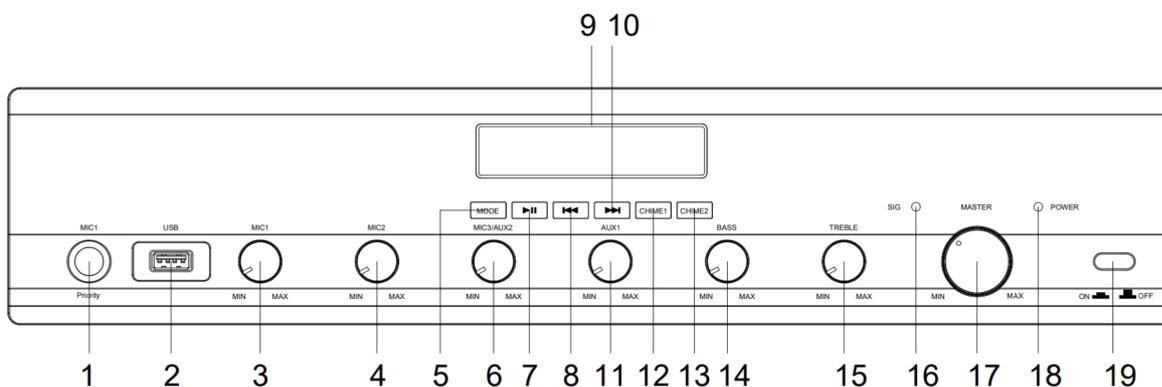

- 1. MIC1 IN
- 2. USB Port
- 3. MIC1 Volume Control
- 4. MIC2 Volume Control
- 5. Mode Button
- 6. MIC3/AUX2 Volume Control
- 7. Play/Pause Button
- 8. Previous Song
- 9. Display Screen
- 10. Next Song
- 11. AUX1 Volume Control
- 12. Chime 1 Button
- 13. Chime 2 Button
- 14. BASS Volume Control
- 15. TREBLE Volume Control
- 16. LEVEL LED
- 17. MASTER Volume Control
- 18. POWER LED
- 19. POWER

REAR PANEL

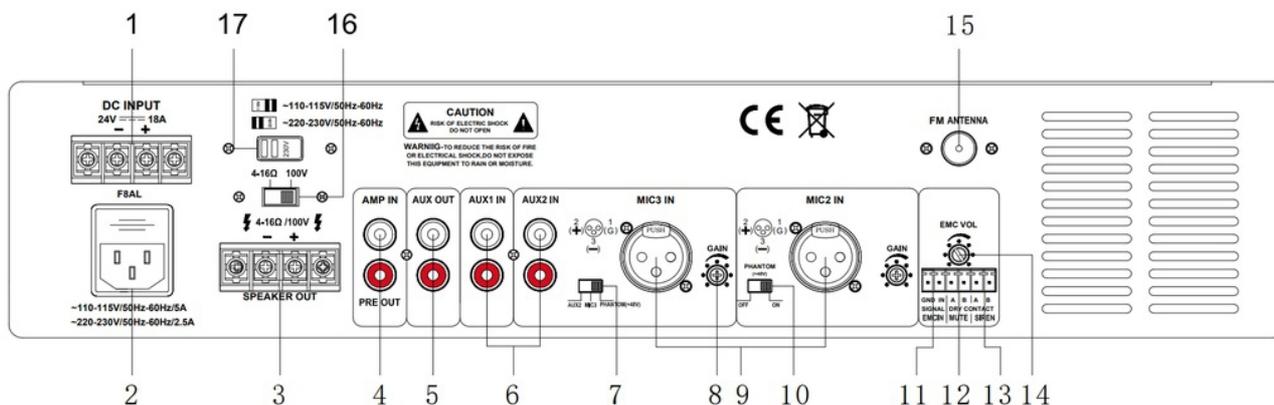

- 1. DC +24 Power IN
- 2. Power IN Socket
- 3. Constant Resistance and constant voltage output end
- 4. Extended Preamplifier Interface
- 5. AUX OUT
- 6. AUX1 IN and AUX2 IN
- 7. Audio Source Selection Switch
- 8. MIC Gain Control
- 9. MIC2 and MIC3 Balanced IN
- 10. Phantom Power Switch
- 11. EMC Trigger IN
- 12. MUTE Short Circuit Trigger
- 13. SIREN Short Circuit Trigger
- 14. Alarm Gain Control
- 15. FM Antenna
- 16. Constant resistance & constant voltage switch
- 17. AC Power Switch

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90300121MA	Digital Mixer Amplifier with Multimedia Player 120W	01

Digital Mixer Amplifier with Multimedia Player 120W

ACCESSORIES INFORMATION

Description	Standard Quantity
FM Antenna	01
Remote Controller	01
Power Cord	01
6P Green Plug with Lock	01
2-pin RCA SC Cap	01
Handle	02
Plastic Washer	04
Cross Recessed Countersunk Head Screw Black /3x8	04
Cross Recessed Raised Countersunk Head Screw Black /5x19	04
User Manual	01
Warranty Card	01
Certificate	01