

60W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH



DESCRIPTION

The NVS-90210061MA is a 1.5U designed Mini Digital amplifier with USB/FM and Bluetooth and have outputs of 100 V, 70 V, and rated resistance outputs of 4-16 Ω. It provides 2 auxiliary inputs and 1 auxiliary output. Microphone 1 is 6.3mm jack in front panel and Microphone2 is XLR in rear panel, also phantom power is available for Microphone2. For each microphone and auxiliary, individual volume control is available. It also contain EMC signal inputs.


FEATURES

- ⦿ Built in MP3 player, FM radio & Bluetooth with remote controller
- ⦿ 2 microphone input, 2 EMC inputs, 2 line inputs, 1 line output, 1 EMC output
- ⦿ Individual volume control for Microphone 1-2, line 1-2, Mp3/FM, bass/treble and master volume control
- ⦿ LED indicators for power, clip, protect and signal
- ⦿ Priority: EMC/Microphone1 >Auxiliary1/Auxiliary2/Microphone2
- ⦿ Support both AC110-240V & DC 24V power supply
- ⦿ Fashionable design, compact mini size public address amplifier
- ⦿ Speaker output of 100V or 70V & 4 -16 ohms

Specifications	
Model	NVS-90210061MA
Rated Power	60W
Frequency Response	Mic: 200Hz~10kHz(±3dB) Line: 100Hz~15kHz(±3dB)
Input sensitivity	Mic: 5.5m±1mV Line: 350mV±10%
Total Harmonic Distortion	<1% 1KHz
Signal to Noise Ratio	<5mV (4Ω load output terminal)
Tone	Treble: 10dB(±2dB) Bass: 10dB(±2dB)
Power Consumption @ 1/8 Load	17.5 W
Power Consumption @ 1/4 Load	27 W
Power Consumption @ 1/2 Load	47.5 W
Power Supply	AC110-240V & 50/60Hz
Output voltage/Impedance	70V&100V/4-16Ω
Weight	2.6kg
Dimension(D×W×H)	198×247×66mm


60W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

FRONT PANEL

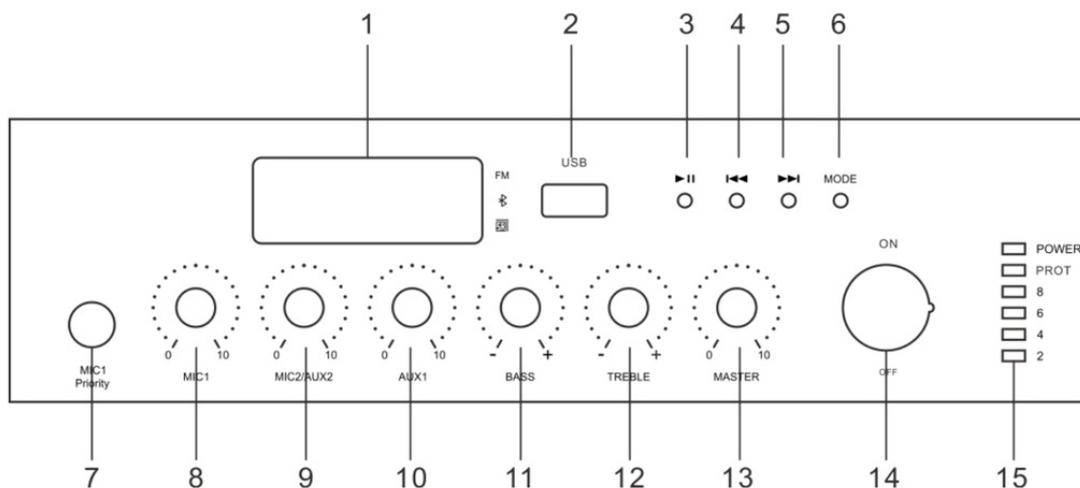

- | | |
|--|--------------------------------|
| 1. Display screen | 9. MIC2/AUX2 volume adjustment |
| 2. USB interface | 10. AUX1 volume adjustment |
| 3. Play/Pause | 11. Bass volume adjustment |
| 4. Previous song/(Previous FM when in FM mode) | 12. Treble volume adjustment |
| 5. Next song/(Next FM when in FM mode) | 13. Master volume adjustment |
| 6. Mode main function key | 14. Power switch |
| 7. MIC1 Input | 15. Level indicator |
| 8. MIC1 volume adjustment | |

REAR PANEL

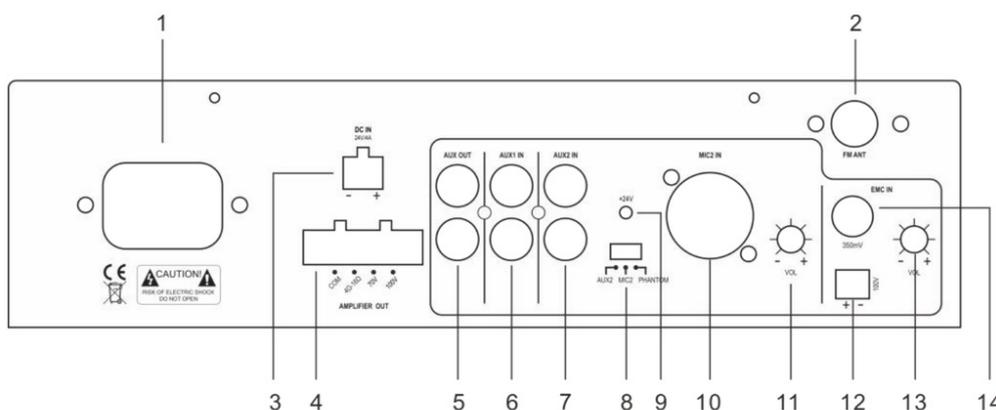

- | | |
|-------------------------|--|
| 1. Power input | 8. Audio source selection switch (AUX2-MIC2) |
| 2. FM antenna interface | 9. Indicator of phantom power |
| 3. DC power input | 10. MIC2 balanced input interface |
| 4. Audio power output | 11. AUX2/MIC2 volume control |
| 5. AUX output | 12. 100V emergency signal input |
| 6. AUX1 input port | 13. Emergency input volume control |
| 7. AUX2 input port | 14. General emergency signal input port |

NVS-90210061MA



60W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90210061MA	60W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH	01

ACCESSORIES INFORMATION

Description	Standard Quantity
FM antenna	01
Remote control	01
Power line	01
Manual	01