

# 250W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

MIXER AMPLIFIER



## DESCRIPTION

The NVS-90230251MA is 1.5U Mini Digital Mixer Amplifier with inbuilt USB/FM and Bluetooth. Both 70V/100V and 4-16 Ω speaker outputs are available. The product has one AUX output and two AUX inputs. It also has two MIC inputs. The MIC1 is 6.3mm jack in front panel and MIC2 is XLR port in rear panel. It has separate volume control for each MIC and Aux input, also have Bass and Treble control.


## FEATURES

- ⊙ Built-in Bluetooth, Radio and USB function
- ⊙ 2 MIC IN, 2 EMC IN, 1 EMC OUT, 2 LINE IN, 1 LINE OUT
- ⊙ Support IR remote control
- ⊙ Priority function is EMC/MIC1>AUX1/AUX2/MIC2
- ⊙ Master volume control
- ⊙ Individual volume control of MIC & LINE, as well as treble and bass volume control
- ⊙ 70V/100V constant voltage output, 4Ω~16Ω constant resistance output.

Specifications	
Model	NVS-90230251MA
Rated Power	250W
Frequency Response	Mic: 200Hz~10KHz Aux: 100Hz~16KHz
Input Sensitivity	Mic: 8mV±10% Aux: 350mV±10%
Total Harmonic Distortion	<1% 1KHz
Signal to Noise Ratio	75dB
Tone	Bass: 10dB(±2dB) Treble: 10dB(±2dB)
Power Consumption @ 1/8 Load	64W
Power Consumption @ 1/4 Load	106W
Power Consumption @ 1/2 Load	188W
Output Voltage/Impedance	70V&100V / 4-16Ω
Power Supply	AC110-120V / AC220~240V 50/60Hz (Selectable with switch)
Weight	3Kg
Dimension(L×W×H)	250×230×66mm


# 250W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

## FRONT PANEL

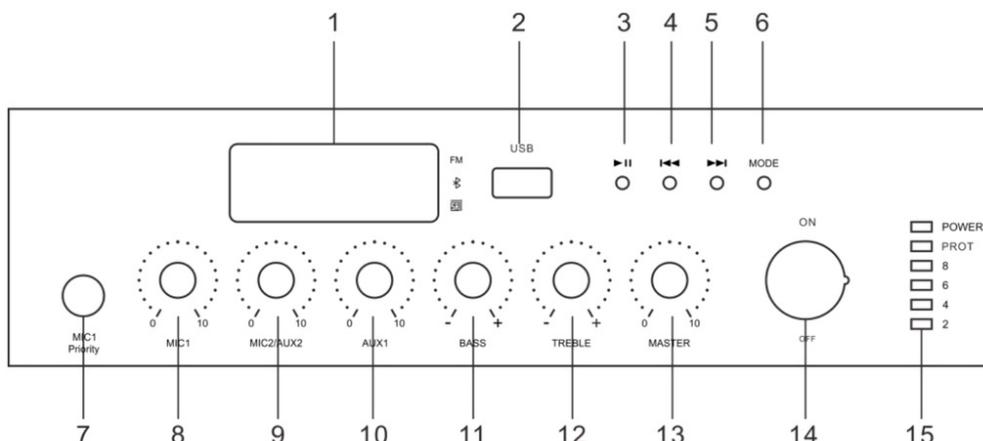

- |  |                                |
|--|--------------------------------|
| 1. Display screen                              | 9. MIC2/AUX2 volume adjustment |
| 2. USB interface                               | 10. AUX1 volume adjustment     |
| 3. Play/Pause                                  | 11. Bass volume adjustment     |
| 4. Previous song/(Previous FM when in FM mode) | 12. Treble volume adjustment   |
| 5. Next song/(Next FM when in FM mode)         | 13. Master volume adjustment   |
| 6. Mode main function key                      | 14. Power switch               |
| 7. MIC1 Input                                  | 15. Level indicator            |
| 8. MIC1 volume adjustment                      |                                |

## REAR PANEL

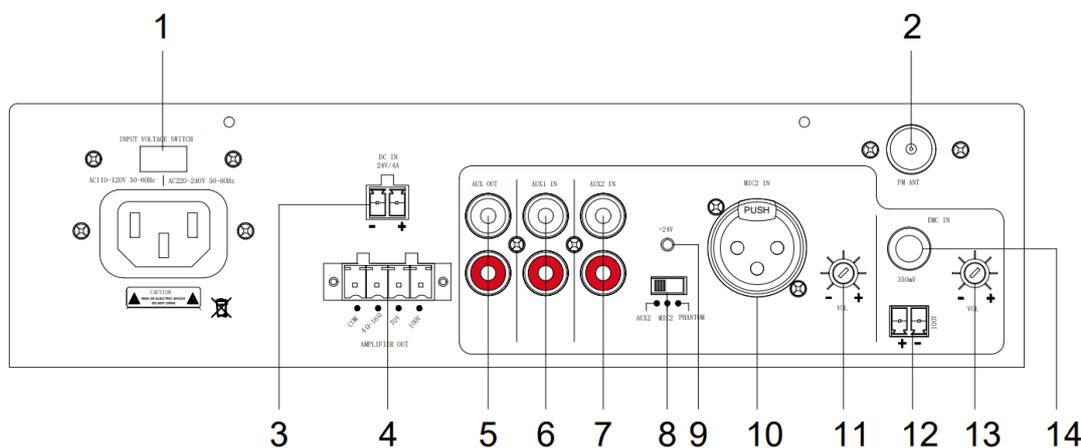

- |                                |                                  |
|--------------------------------|----------------------------------|
| 1. Power in                    | 8. Audio Source Selection Switch |
| 2. FM Antenna Interface        | 9. Phantom Voltage LED           |
| 3. DC24V Power Input           | 10. MIC2 Balanced IN             |
| 4. Audio Power Output Terminal | 11. AUX2/MIC2 VOL                |
| 5. AUX OUT                     | 12. 100V EMC IN                  |
| 6. AUX1 IN                     | 13. EMC IN VOL                   |
| 7. AUX2 IN                     | 14. General EMC IN               |

**NVS-90230251MA**



# 250W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90230251MA	250W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
FM antenna	01
Remote control	01
Power line	01
User Manual	01