

120W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH



DESCRIPTION

The NVS-90220121MA is a Mini Digital amplifier with USB/FM and Bluetooth. The Amplifier provides, speaker output 70V/100V and 4-16Ω. It provides 2 Auxiliary inputs and 1 Auxiliary output. Microphone1 is 6.3 mm jack in front panel and Microphone2 is XLR port in rear panel, also phantom power is available for Microphone2. Individual volume control for Microphone and Auxiliary and also provides Bass and Treble control. It also has EMC signal inputs for the emergency situations.

FEATURES


- ⊙ Built-in Bluetooth, FM, and USB function
- ⊙ 2 MIC inputs, 2 EMC inputs, 1 EMC output, 2 line inputs, 1 line output
- ⊙ Speaker output of 100V/70V and 4-16ohms
- ⊙ Can be controlled by the infrared remote controller
- ⊙ Priority: EMC/MIC1>AUX1/AUX2/MIC2
- ⊙ Individual volume control for MIC & LINE, bass/treble and master volume control

Specifications

Model	NVS-90220121MA
Rated Power	120W
Frequency Response	Mic: 100Hz~8kHz(±3dB) Line: 80Hz~15kHz(±3dB)
Input Sensitivity	Mic: 7mV±1mV Line: 300mV±10% EMC: 350mV±10%
Total Harmonic Distortion	<1% 1kHz
Signal to Noise Ratio	≤6mV(4Ω load out)
Tone	Treble: 10dB (±2dB) Bass: 10dB (±2dB)
Output voltage/Impedance	70V,100V/4-16Ω
Power Consumption @ 1/8 Load	29.5W
Power Consumption @ 1/4 Load	50.5W
Power Consumption @ 1/2 Load	92W
Power Supply	~110-240V 50/60Hz
Weight	3Kg
Dimension[L×W×H]	198×247×66mm


120W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

FRONT PANEL

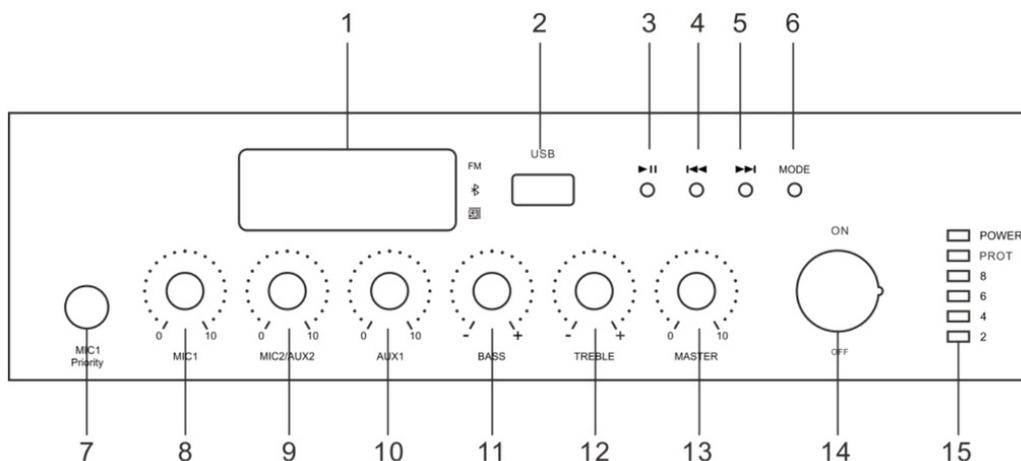

- 1. Display screen
- 2. USB interface
- 3. Play/Pause
- 4. Previous song/(Previous FM when in FM mode)
- 5. Next song/(Next FM when in FM mode)
- 6. Mode main function key
- 7. MIC1 Input
- 8. MIC1 volume adjustment
- 9. MIC2/AUX2 volume adjustment
- 10. AUX1 volume adjustment
- 11. Bass volume adjustment
- 12. Treble volume adjustment
- 13. Master volume adjustment
- 14. Power switch
- 15. Level indicator

REAR PANEL

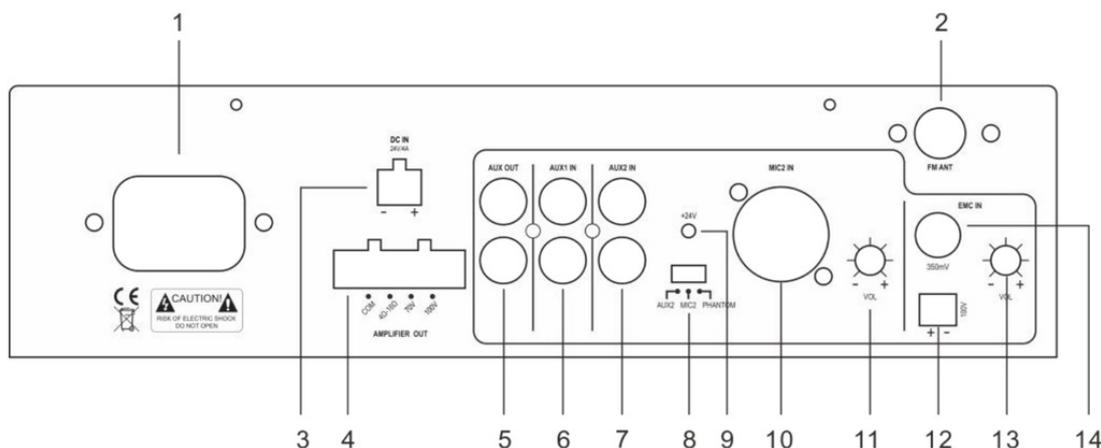

- 1. Power input
- 2. FM antenna interface
- 3. DC power input
- 4. Audio power output
- 5. AUX output
- 6. AUX1 input port
- 7. AUX2 input port
- 8. Audio source selection switch (AUX2-MIC2)
- 9. Indicator of phantom power
- 10. MIC2 balanced input interface
- 11. AUX2/MIC2 volume control
- 12. 100V emergency signal input
- 13. Emergency input volume control
- 14. General emergency signal input port

NVS-90220121MA



120W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90220121MA	120W MINI DIGITAL MIXER AMPLIFIER WITH USB & BLUETOOTH	01

ACCESSORIES INFORMATION

Description	Standard Quantity
FM antenna	01
Remote control	01
Power line	01
Manual	01