

# PROFESSIONAL STEREO POWER AMPLIFIER 2x700W



## DESCRIPTION

The NVS-20161402AM is a two-channel stereo amplifier with low distortion and high efficiency. Equipped with reliable protection of overvoltage, under-voltage, DC protection, short circuit and alarming function conference. BTL connectivity is offered. It is appropriate for conference systems, meeting rooms, and daily activities.


## FEATURES

- ◉ Low Distortion
- ◉ Stereo Operation
- ◉ BTL Connectivity

Specifications	
Model	NVS-20161402AM
Rated Output / Channel, 8Ω	400W
Rated Output / Channel, 4Ω	700W
Rated Output / BTL, 8Ω	1400W
Frequency Response	20Hz - 20kHz
Input sensitivity	1.2dBV
Total Harmonic Distortion	<0.1% into 4Ω/1kHz
Signal to Noise Ratio	100dB
Damping Factor	200:1/8Ω, 1kHz
Input CMRR	>90dB
Channel Impedance	4-16Ω
Voltage Gain	>38dB
Weight	23.5Kg
Dimension	484×446×88mm


# PROFESSIONAL STEREO POWER AMPLIFIER 2x700W

## FRONT PANEL

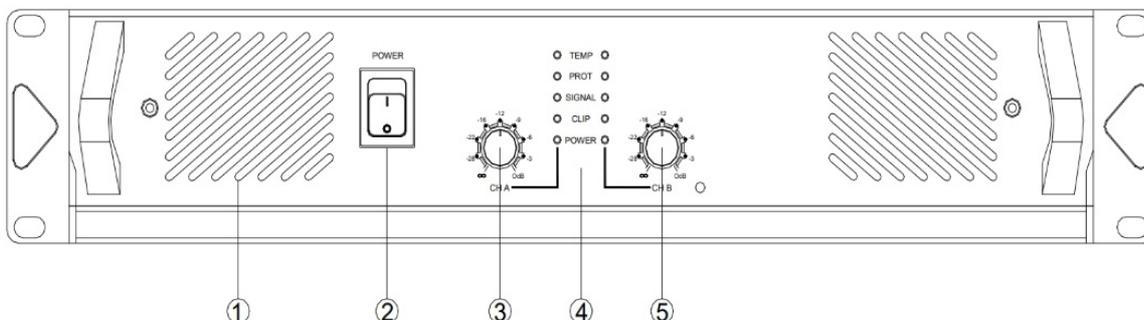

1. Cooling Fan
2. Power Switch
3. Channel A volume control knob (input attenuation)
4. Machine working status indicator
5. Channel B volume control knob (input attenuation)

## REAR PANEL

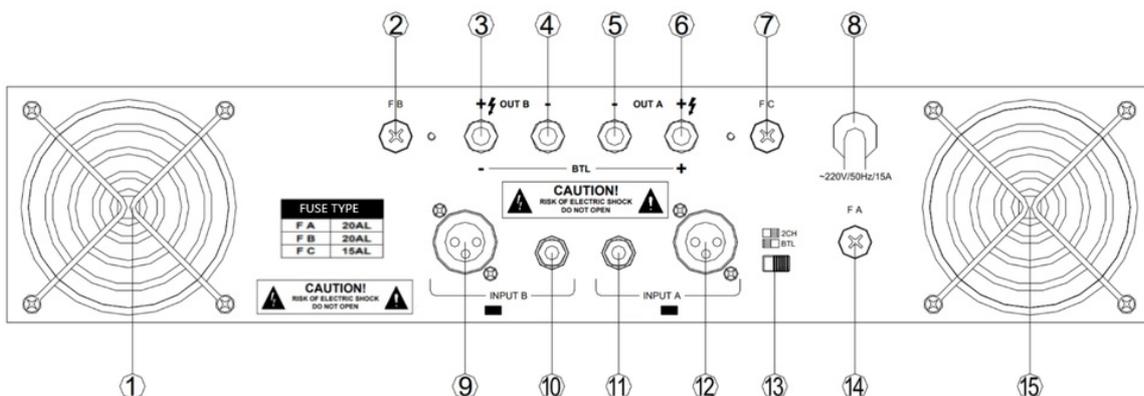

1. Cooling fan window
2. Channel B exchange fuse
3. Channel B amplifier output "+" class terminal
4. Channel B amplifier output "-" class terminal
5. Channel A amplifier output "-" class terminal
6. Channel A amplifier output "+" class terminal
7. Machine AC220V power input fuse holder
8. Machine AC220V power input cable
9. Channel B line audio input XLR interface
10. Channel B line audio input 6.35mm interface
11. Channel A line audio 6.35mm interface
12. Channel A line audio input XLR interface
13. Power amplifier working mode selection switch
14. Local AC220V power input fuse holder
15. Cooling fan window

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-20161402AM	PROFESSIONAL STEREO POWER AMPLIFIER 2x700W	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01