



Arteor™ Control for hotel equipment


Cat. No(s): 5 722 01/02/19/20 - 5 727 01/02/19/20
 5 732 19/20/22/23/24/25/34/35/36/37
 5 737 19/20/22/23/24/25/34/35/36/37



5 722 01 - 5 727 01



5 732 22 - 5 737 22



5 732 37 - 5 737 37

1. USE

Control (up, down, stop) for awnings, roller shutters, etc.
 Double two-way switch for direct control of a motor (mechanism with fixed positions).
 The mechanisms can be flush-mounted or surface-mounted.


2. RANGE

	Description	White	Magnesium
	Curtain switch Center retract Square - 1 module	5 722 01	5 727 01
	Curtain switch Center OFF Square - 1 module	5 722 02	5 727 02
	Double push for electric shutter Square - 2 modules	5 722 19	5 727 19
	Double switch for electric shutter Square - 2 modules	5 722 20	5 727 20
	Double push for electric shutter Round - 2 modules	5 732 19	5 737 19
	Double switch for electric shutter Round - 2 modules	5 732 20	5 737 20
	Double switch Roller blinds marking Square - 2 modules	5 732 22	5 737 22
	Double switch Roller blinds marking Round - 2 modules	5 732 23	5 737 23
	Double push Roller blinds marking Square - 2 modules	5 732 24	5 737 24
	Double push Roller blinds marking Round - 2 modules	5 732 25	5 737 25

2. RANGE (continued)

	Description	White	Magnesium
	Double switch Curtain marking Square - 2 modules	5 732 34	5 737 34
	Double switch Curtain marking Round - 2 modules	5 732 35	5 737 35
	Double push Curtain marking Square - 2 modules	5 732 36	5 737 36
	Double push Curtain marking Round - 2 modules	5 732 37	5 737 37

3. OVERALL DIMENSIONS (mm)

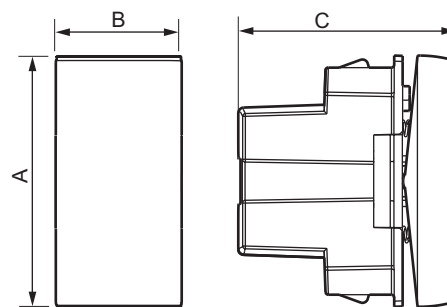


	A	B	C
1 module	45	22.5	39
2 modules	45	45	42

4. CONNECTION


Number of terminals: 3
 Type of terminals: with screws
 Terminal capacity: 2 x 1.5 mm² or 1 x 1.4 mm²
 Stripping length:
 - 8 mm for 5 722 01/02 - 5 727 01/02
 - 10 mm for 5 722 19/20 - 5 727 19/20
 5 732 19/20/22/23/24/25/34/35/36/37
 5 737 19/20/22/23/24/25/34/35/36/37
 Type of screwdriver: flat-blade screwdriver 4 mm up to 5.5 mm

■ 4.1 Control of an electronic control box



For: 5 722 01/19 - 5 732 19/24/25/36/37
 5 727 01/19 - 5 737 19/24/25/36/37

■ 4.2 Direct control of a motor

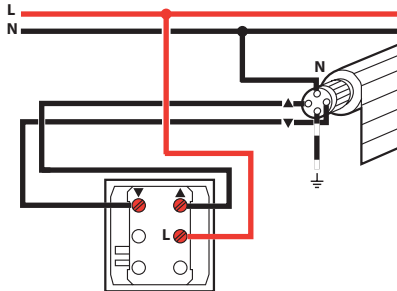

For: 5 722 02/20 - 5 732 20/22/23/34/35
 5 727 02/20 - 5 737 20/22/23/34/35

5. OPERATION

Used for direct and individual control of a roller shutter motor.
 Fitted with two switches linked by a system preventing simultaneous pressing of both switches STOP control is obtained by opening both switches.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40 (mounted)
 IP 20 (alone)

Impact test: IK 04

■ 6.2 Material characteristics

Rocker: Polycarbonate
 Base: Polycarbonate
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

Voltage: 250 Vac
 Current: 10 A
 6 A for Cat. No(s) 5 722 01 - 5 727 01

■ 6.4 Climatic characteristics

Storage and operating temperatures: - 20° C to + 40° C

7. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN-60669-1),
 Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach
 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

CAT. N° 5 723 60



RCBO ARTEOR - SINGLE POLE + NEUTRAL - 30 MA - 2 MODULES - WHITE

Pack (number of units)	1
Volume (dm ³)	0,188
Weight (g)	86,00

Product characteristics

RCBO - 16 A - 230 V~

- Single pole + Neutral - 30 mA
- 2 modules
- The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth
- With test button
- White

General characteristics

Arteor™ ventilation, heating, roller blinds control, RCBO and MCB

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation



Catalogue pages & additional information

- [Description page \(p.459\)](#)



Installation instructions & related documents

- [LE02277AA](#)