



Mosaic™ International socket outlets

Cat. No(s): 5 721 12/13/14/21/24/31/32/33/34



5 721 12












5 721 13

1. USE


Socket outlets for different international standards.

2. RANGE


	Designation	Cat. Nos.	Number of modules	Connection method	Weight (g)	Characteristics
	Australian socket 2P+E white	5 721 12	2	with screws	33.3	15 A - 240 VAC
	Chinese socket 2P+E white	5 721 13	2	with screws	36.6	10 A - 250 VAC
	Australian socket 2P+E white	5 721 14	2	with screws	36.2	10 A - 240 VAC
	Chinese socket 2P+E white	5 721 21	2	with screws	45.1	16 A - 250 VAC
	Israeliian socket 2P+E white	5 721 24	2	with screws	32.6	16 A - 250 VAC
	Chinese 2P+E + Euro/US socket 2P white	5 721 31	3	with screws	55.4	16 A - 250 VAC 10 A - 250 VAC
	British switched socket 2P+E white	5 721 32	3	with screws	64.4	15/16 A 250 VAC
	Euro/US double socket 2 x 2P+E white	5 721 33	3	with screws	58.2	15 A - 127 VAC 16 A - 250 VAC
	US double socket 2 x 2P+E white	5 721 34	3	with screws	57.5	15 A - 127 VAC

3. PREPARATION

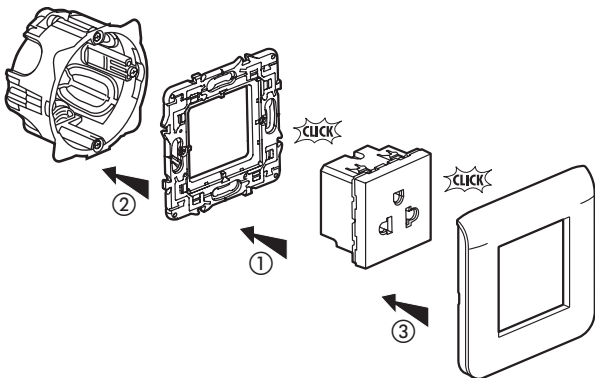
The mechanisms can be flush-mounted or surface-mounted.



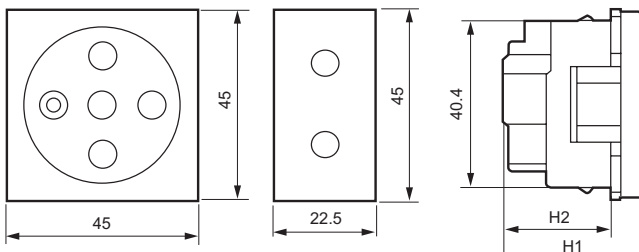4. OVERALL DIMENSIONS



Cat. No.	H1	H2
5 721 12	41	31.5
5 721 13	29.7	21.1
5 721 14	32	23.4
5 721 21	32	23
5 721 24	37	28

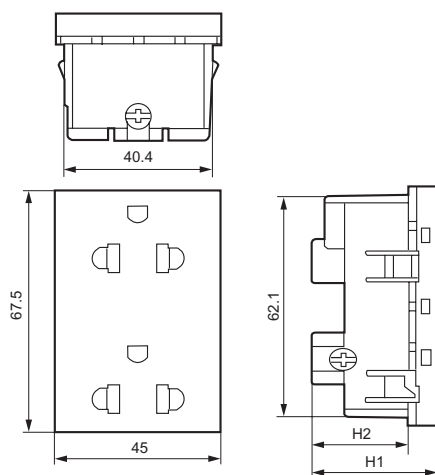

Cat. No.	H1	H2
5 721 31	32.8	24.2
5 721 32	41.5	28.5
5 721 33	35.2	26.7
5 721 34		

5. CONNECTION

Cat. No.	Capacity	Stripping	Screwdriver
5 721 12	2 x 4 mm ²	9 mm	Cross-head 2 or 4 mm flat-blade
5 721 13			4 mm flat-blade
5 721 14		13 mm	Cross-head 2 or 4 mm flat-blade
5 721 21	2 x 4 mm ²	9 mm	4 mm flat-blade
5 721 24	2 x 2.5 mm ²	11 mm	Cross-head 2 or 4 mm flat-blade
5 721 31	2 x 4 mm ²	9 mm	4 mm flat-blade
5 721 32			
5 721 33			Cross-head 2 or 4 mm flat-blade
5 721 34			

6. OPERATION

Standard operation by insertion of withdrawal of a plug to normalized standard.

7. TECHNICAL CHARACTERISTICS

7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies / liquids: IP 40 (mounted)
IP 20 (alone)

7.2 Material characteristics

Base: Polycarbonate (except 5 721 24: Polypropylene)
Cover plates: Polycarbonate

7.3 Electrical characteristics

Self-extinguishing: 650° C / 30 s

7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.


Do not use: acetone, tar remover, trichlorethylene.

Resistance to the following cleaning agents: Hexane (EN-60669-1), Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.


Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

Arteor™ International socket outlets


Cat. No(s): 5 718 20/70 - 5 720 20/21 - 5 721 00/01/02/03/04/05/10/11/12/13/14
 5 721 15/16/17/18/19/20/21/22/24/26/31/32/33/34/52
 5 724 60/61/62/63/66 - 5 725 20/21
 5 726 00/01/03/04/05/10/11/12/13/14/16/17/18/19/20/21/24
 5 726 22/26/31/32/33/34/52 - 5 729 40/90



5 721 11



5 721 19



5 729 40














CONTENTS

	Page
1. Use	1
2. Range	1-2
3. Preparation	3
4. Overall dimensions	3
5. Connection	4
6. Operation	4
7. Technical characteristics	4
8. Cleaning	4

















1. USE

Socket outlets for different international standards.

2. RANGE


	Designation	Finishes			No. of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium	Other				
	Franco/Belgian socket 2P	5 720 20	5 725 20	-	2	with screws	26	10/16 A 250 VAC
	Franco/Belgian socket 2P+E	5 720 21	5 725 21	Tamperproof red 5 724 66	2	with screws	33.3	10/16 A 250 VAC
	ELV socket 2P	5 721 00	5 726 00	-	1	with screws	18.1	3 A - 48 V
	Italian socket 2P+E	5 721 01	5 726 01	-	1	with screws	25.2	10 A - 250 VAC
	Switzerland socket 2P+E with shutter	5 721 02	-	-	1	with screws	18.7	10 A - 250 VAC
	Italian socket 2P+E	5 721 03	5 726 03	-	1	with screws	25.5	10/16 A 250 VAC
	Euro/US socket 2P	5 721 04	5 726 04	-	1	with screws	21.5	15 A - 127 VAC 16 A - 250 VAC
	US socket 2P	5 721 05	5 726 05	-	1	with screws	23.1	15 A - 127 VAC
	British standard socket 2P+E	5 721 10	5 726 10	-	2	with screws	42.5	5 A - 250 VAC
	British socket 2P+E	5 721 11	5 726 11	-	2	with screws	38.2	13 A - 250 VAC
	Australian socket 2P+E	5 721 12	5 726 12	-	2	with screws	33.3	15 A - 240 VAC
	Chinese socket 2P+E	5 721 13	5 726 13	-	2	with screws	36.6	10 A - 250 VAC
	Australian socket 2P+E	5 721 14	5 726 14	-	2	with screws	36.2	10 A - 240 VAC

2. RANGE (continued)


	Designation	Finishes			No. of modules	Connection method	Weight (g)	Characteristics
		White	Magnesium	Other				
	Switzerland socket 2P+E - TYP13 without shutter	5 718 20	5 718 70	-	2	automatic terminals	23	10 A - 250 VAC
	Switzerland socket 2P+E - TYP13 with shutter	5 721 15	-	-				
	Euro/US socket 2P+E	5 721 16	5 726 16	-	2	with screws	42.3	15 A - 127 VAC 16 A - 250 VAC
	US socket 2P+E	5 721 17	5 726 17	-	2	with screws	38.5	15 A - 127 VAC
	German socket 2P+E	5 721 18	5 726 18	Orange: 5 724 60 Green: 5 724 62 Tamperproof red: 5 724 63	2	with screws	37.1	16 A - 250 VAC
	German socket with cover 2P+E	5 721 19	5 726 19	-	2	with screws	39.2	16 A - 250 VAC
	German socket for air conditioner 5.5 mm² wires	5 721 20	5 726 20	-	2	with screws	39	16 A - 250 VAC
	Chinese socket 2P+E	5 721 21	5 726 21	-	2	with screws	45.1	16 A - 250 VAC
	South African socket 2P+E	5 721 22	5 726 22	Temperproof red 5 724 61	2	with screws	21.7	16 A - 250 VAC
	Israeli socket 2P+E	5 721 24	5 726 24	-	2	with screws	32.6	16 A - 250 VAC
	Australian socket 2P+E	5 721 26	5 726 26	-	2	with screws	37	10 A - 240 VAC
	Chinese 2P+E + Euro/US socket 2P	5 721 31	5 726 31	-	3	with screws	55.4	16 A - 250 VAC 10 A - 250 VAC
	British switched socket 2P+E	5 721 32	5 726 32	-	3	with screws	64.4	15/16 A 250 VAC
	Euro/US double socket 2 x 2P+E	5 721 33	5 726 33	-	3	with screws	58.2	15 A - 127 VAC 16 A - 250 VAC
	US double socket 2 x 2P+E	5 721 34	5 726 34	-	3	with screws	57.5	15 A - 127 VAC
	Australian twin socket 2P+E with integrated frame	5 721 52	5 726 52	-	3	with screws	81.8	10 A - 240 VAC
	German double socket 2P+E	5 729 40	5 729 90	-	4 (delivered with support)	automatic terminals	105.2	16 A - 250 VAC

3. PREPARATION

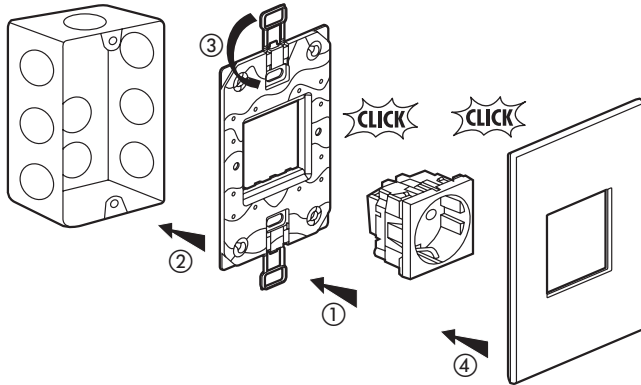The mechanisms can be flush-mounted or surface-mounted.



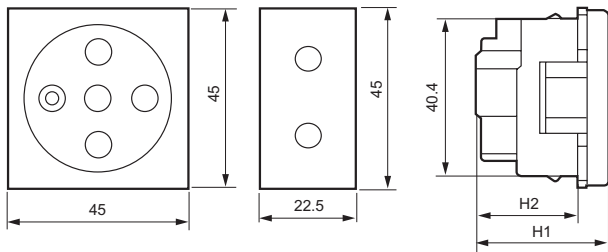
4. OVERALL DIMENSIONS




Cat. No.	H1	H2
5 720 20	37	28
5 725 20		
5 720 21	36	27.5
5 725 21		
5 724 66		
5 721 00	29	20.5
5 726 00		
5 721 01	36.3	27.8
5 726 01		
5 721 03		
5 726 03	30.6	22.2
5 721 02		
5 721 04	35.1	26.6
5 726 04		
5 721 05	38.1	26.7
5 726 05		
5 721 10	31.6	23.1
5 726 10		
5 721 11	30	21.5
5 726 11		
5 721 12	41	31.5
5 726 12		
5 721 13	29.7	21.1
5 726 13		

Cat. No.	H1	H2
5 721 14	32	23.4
5 726 14		
5 721 15	35.2	26.7
5 718 20		
5 718 70		
5 721 16	35.2	25.7
5 726 16		
5 721 17	35.3	26.8
5 726 17		
5 721 18	40	31.5
5 726 18		
5 724 60		
5 724 62		
5 724 63		
5 721 19	44	
5 726 19		
5 721 20	42	36
5 726 20		
5 721 21	32	23
5 726 21		
5 721 22	42	33.5
5 726 22		
5 724 61		
5 721 24	37	28
5 726 24		
5 721 26	32	23.4
5 726 26		

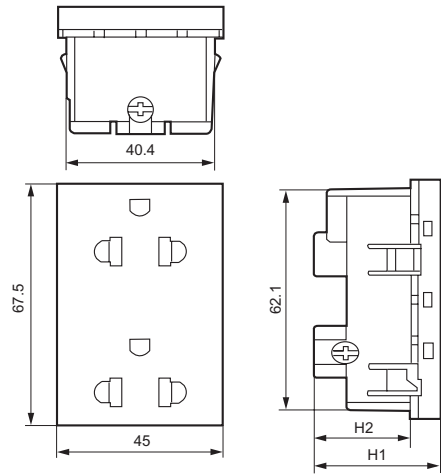4. OVERALL DIMENSIONS (continued)



Cat. No.	H1	H2
5 721 31	32.8	24.2
5 726 31		
5 721 32	41.5	28.5
5 726 32		
5 721 33	35.2	26.7
5 721 34		
5 726 33		
5 726 34		

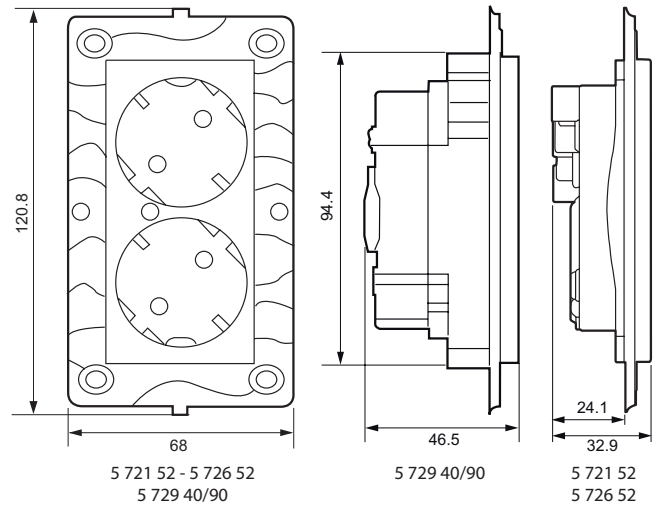

5. CONNECTION

Cat. No.	Capacity	Stripping	Screwdriver	
5 720 20	2 x 4 mm ²	10 mm	4 mm flat-blade	
5 725 20				
5 720 21	2 x 2.5 mm ²	9 mm	Cross-head 2 or 4 mm flat-blade	
5 725 21				
5 724 66				
5 721 00		10 mm	4 mm flat-blade	
5 726 00				
5 721 01	2 x 4 mm ²	9 mm	Cross-head 2 or 4 mm flat-blade	
5 726 01				
5 721 02	2 x 1.5 mm ²	11 mm		
5 721 03	2 x 4 mm ²	9 mm	Cross-head 2 or 4 mm flat-blade	
5 726 03				
5 721 04	2 x 2.5 mm ²			
5 726 04				
5 721 05				
5 726 05				
5 721 10	2 x 4 mm ²			4 mm flat-blade
5 726 10				
5 721 11	2 x 4 mm ²			Cross-head 2 or 4 mm flat-blade
5 726 11				
5 721 12				
5 726 12		4 mm flat-blade		
5 721 13				
5 726 13				
5 721 14				
5 726 14		13 mm	Cross-head 2 or 4 mm flat-blade	
5 721 15		2 x 1.5 mm ²	12 mm	
5 718 20				
5 718 70				
5 721 16	2 x 4 mm ²	9 mm	Cross-head 2 or 4 mm flat-blade	
5 726 16				
5 721 17				
5 726 17				
5 721 18				
5 726 18	2 x 4 mm ²	10 mm	4 mm flat-blade	
5 724 60				
5 724 62				
5 724 63				
5 721 19				
5 726 19				
5 721 20				5.5 mm ²
5 726 20				
5 721 21	2 x 4 mm ²	9 mm		
5 726 21				

5. CONNECTION (continued)

Cat. No.	Capacity	Stripping	Screwdriver
5 721 22	2 x 2.5 mm ²	11 mm	Cross-head 2 or 4 mm flat-blade
5 726 22			
5 724 61			
5 721 24			
5 726 24			
5 721 26	2 x 4 mm ²	13 mm	4 mm flat-blade
5 726 26			
5 721 31			
5 726 31			
5 721 32		9 mm	
5 726 32			
5 721 33			
5 726 33			
5 721 34			2 x 2.5 mm ²
5 726 34			
5 721 52		13 mm	
5 726 52			
5 729 40			
5 729 90			

6. OPERATION

Standard operation by insertion of withdrawal of a plug to normalized standard.

7. TECHNICAL CHARACTERISTICS

■ 7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies / liquids: IP 40 (mounted)
IP 20 (alone)

■ 7.2 Material characteristics

Base: Polycarbonate (except 5 721 24 - 5 726 21: Polypropylene)
Cover plates: Polycarbonate

■ 7.3 Electrical characteristics

Self-extinguishing: 650° C / 30 s

■ 7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING


Surface cleaning with a cloth.

Do not use : acetone, tar remover, trichlorethylene.
Resistance to the following cleaning agents: Hexane (EN-60669-1),
Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach
10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific
cleaning products are to be used.

Arteor™
British standard socket outlets

Cat. No(s): 5 721 30 - 5 726 30 - 5 724 67




1. USE

2 P+E british standard socket outlets shuttered for child safety.
 Mechanisms supplied with rocker plates, to be equipped with support frames and plates.
 Flush mounting or surface mounting.

2. RANGE

	White	Magnesium	Red
2 P+E socket outlets switched With shutters - 3 modules	5 721 30	5 726 30	-
2 P+E socket outlet switched dedicated non standard pin. With shutters - 3 modules	-	-	5 724 67

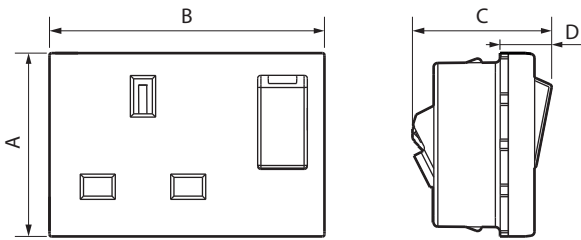3. DIMENSIONS (mm)



A	B	C	D
45	67.5	34	13

4. CONNECTION

Number of terminals: 3 terminals
 Type of terminals: with screws
 Terminal capacity: 3 x 4 mm²
 Striping length: 9 mm
 Screwdriver: cross-head max. 4 mm flat-blade

5. TECHNICAL CHARACTERISTICS

- **5.1 Mechanical characteristics**
 Protection against impact: IK 04
 Protection against solid bodies and liquids: IP 40 (mounted)
 IP 20 (alone)
- **5.2 Material characteristics**
 Polyglass appearance
 Base: Polycarbonate
 Cover plates: Polycarbonate
 Halogen free
 UV resistant
 Self-extinguishing:
 + 850° C / s for insulating parts holding live parts in place
 + 650° C / 30 s for other parts made of insulating materials.
- **5.3 Electrical characteristics**
 Voltage: 250 V~
 Current: 13 A
 Frequency: 50/60 Hz
- **5.4 Climatic characteristics**
 Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. MAINTENANCE

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.
 Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.

CAT. N° 5 721 15

**SOCKET ARTEOR - SWISS - 10 A - 2P+E SHUTTERED -
TYPE 13 - 2 MODULES - WHITE**

Pack (number of units)	10
Volume (dm ³)	1,581
Weight (g)	310,00

Product characteristics**Swiss type socket outlets****2P+E type 13 shuttered for child safety - 10 A**

- 2 modules
- White
- Can be installed in receptacles for floor sockets

General characteristics**Arteor™ international socket outlets**

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation**Catalogue pages & additional information**

- [Selection chart \(p.449\)](#)
- [Description page \(p.466\)](#)

**Installation & technical data**

- [F00723EN-05](#)