



Arteor™ Control for hotel equipment


Cat. No(s): 5 722 01/02/19/20 - 5 727 01/02/19/20
 5 732 19/20/22/23/24/25/34/35/36/37
 5 737 19/20/22/23/24/25/34/35/36/37



5 722 01 - 5 727 01



5 732 22 - 5 737 22



5 732 37 - 5 737 37

1. USE

Control (up, down, stop) for awnings, roller shutters, etc.
 Double two-way switch for direct control of a motor (mechanism with fixed positions).
 The mechanisms can be flush-mounted or surface-mounted.


2. RANGE

	Description	White	Magnesium
	Curtain switch Center retract Square - 1 module	5 722 01	5 727 01
	Curtain switch Center OFF Square - 1 module	5 722 02	5 727 02
	Double push for electric shutter Square - 2 modules	5 722 19	5 727 19
	Double switch for electric shutter Square - 2 modules	5 722 20	5 727 20
	Double push for electric shutter Round - 2 modules	5 732 19	5 737 19
	Double switch for electric shutter Round - 2 modules	5 732 20	5 737 20
	Double switch Roller blinds marking Square - 2 modules	5 732 22	5 737 22
	Double switch Roller blinds marking Round - 2 modules	5 732 23	5 737 23
	Double push Roller blinds marking Square - 2 modules	5 732 24	5 737 24
	Double push Roller blinds marking Round - 2 modules	5 732 25	5 737 25

2. RANGE (continued)

	Description	White	Magnesium
	Double switch Curtain marking Square - 2 modules	5 732 34	5 737 34
	Double switch Curtain marking Round - 2 modules	5 732 35	5 737 35
	Double push Curtain marking Square - 2 modules	5 732 36	5 737 36
	Double push Curtain marking Round - 2 modules	5 732 37	5 737 37

3. OVERALL DIMENSIONS (mm)

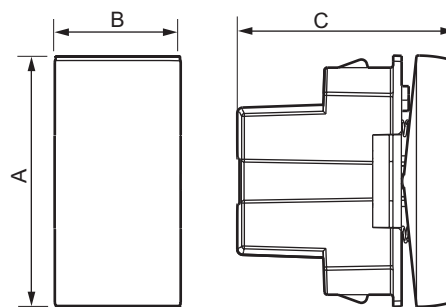


	A	B	C
1 module	45	22.5	39
2 modules	45	45	42

4. CONNECTION


Number of terminals: 3
 Type of terminals: with screws
 Terminal capacity: 2 x 1.5 mm² or 1 x 1.4 mm²
 Stripping length:
 - 8 mm for 5 722 01/02 - 5 727 01/02
 - 10 mm for 5 722 19/20 - 5 727 19/20
 5 732 19/20/22/23/24/25/34/35/36/37
 5 737 19/20/22/23/24/25/34/35/36/37
 Type of screwdriver: flat-blade screwdriver 4 mm up to 5.5 mm

■ 4.1 Control of an electronic control box



For: 5 722 01/19 - 5 732 19/24/25/36/37
 5 727 01/19 - 5 737 19/24/25/36/37

■ 4.2 Direct control of a motor

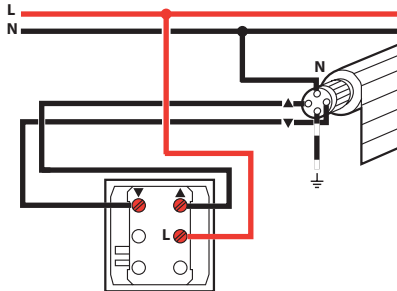

For: 5 722 02/20 - 5 732 20/22/23/34/35
 5 727 02/20 - 5 737 20/22/23/34/35

5. OPERATION

Used for direct and individual control of a roller shutter motor.
 Fitted with two switches linked by a system preventing simultaneous pressing of both switches STOP control is obtained by opening both switches.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40 (mounted)
 IP 20 (alone)

Impact test: IK 04

■ 6.2 Material characteristics

Rocker: Polycarbonate
 Base: Polycarbonate
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

Voltage: 250 Vac
 Current: 10 A
 6 A for Cat. No(s) 5 722 01 - 5 727 01

■ 6.4 Climatic characteristics

Storage and operating temperatures: - 20° C to + 40° C

7. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN-60669-1),
 Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach
 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific
 cleaning products are to be used.

CAT. N° 5 720 67



HOTEL BEDROOM CALL INDICATOR - LAMP + BELL PUSH - 2 ROUND MODULES - WHITE

Pack (number of units)	5
Volume (dm ³)	0,985
Weight (g)	280,00

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Indicator for corridor

- Indicator lamp and bell push
- Installed in the corridor, display calls
- Supplied with LED
- White

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

Catalogue pages & additional information

- [Description page \(p.441\)](#)

Agreements & certificates of conformity

- [OC / CB - CN51287](#)
- [OC / CB - SE-88889](#)
- [CCC - 2002010202027257](#)
- [OC / CB - CN16969](#)
- [OC / CB - CN16969-M1](#)

Installation instructions & related documents

- [LE01561AB](#)

CAT. N° 5 725 67



HOTEL BEDROOM CALL INDICATOR - LAMP + BELL PUSH - 2 ROUND MODULES - MAGNESIUM

Pack (number of units)	5
Volume (dm ³)	0,985
Weight (g)	276,00

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Indicator for corridor

- Indicator lamp and bell push
- Installed in the corridor, display calls
- Supplied with LED
- Magnesium

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

Catalogue pages & additional information

- [Description page \(p.441\)](#)

Agreements & certificates of conformity

- [OC / CB - CN51287](#)
- [OC / CB - SE-88889](#)
- [CCC - 2002010202027257](#)
- [OC / CB - CN16969](#)
- [OC / CB - CN16969-M1](#)

Installation instructions & related documents

- [LE01561AB](#)

CAT. N° 5 727 31



HOTEL BEDROOM CALL INDICATOR - LAMP + BELL PUSH - 2 ROUND MODULES - SOFT ALU

Pack (number of units)	O/R
Volume (dm ³)	O/R
Weight (g)	O/R

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Indicator for corridor

- Indicator lamp and bell push
- Installed in the corridor, display calls
- Supplied with LED
- Soft Alu

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

CAT. N° 5 720 74



HOTEL BEDROOM CALL INDICATOR - INTERNAL CONTROL UNIT - 2 ROUND MODULES - WHITE

Pack (number of units)	5
Volume (dm ³)	1,39
Weight (g)	287,00

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Internal control unit

- Allows the user to select the desired setting
- Supplied with LED
- White

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

Catalogue pages & additional information

- [Description page \(p.441\)](#)

Agreements & certificates of conformity

- [OC / CB - FR_705038/A1](#)

Installation instructions & related documents

- [LE01561AB](#)

CAT. N° 5 725 74



HOTEL BEDROOM CALL INDICATOR - INTERNAL CONTROL UNIT - 2 ROUND MODULES - MAGNESIUM

Pack (number of units)	5
Volume (dm ³)	0,758
Weight (g)	285,00

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Internal control unit

- Allows the user to select the desired setting
- Supplied with LED
- Magnesium

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

Catalogue pages & additional information

- [Description page \(p.441\)](#)

Agreements & certificates of conformity

- [OC / CB - FR_705038/A1](#)

Installation instructions & related documents

- [LE01561AB](#)

CAT. N° 5 727 49



HOTEL BEDROOM CALL INDICATOR - INTERNAL CONTROL UNIT - 2 ROUND MODULES - SOFT ALU

Pack (number of units)	O/R
Volume (dm ³)	O/R
Weight (g)	O/R

Product characteristics

Hotel bedroom call indicators

- Enable the resident to inform hotel staff of the room status
- Two settings are possible:
 - Do not disturb
 - Please clean the room
- 2 x 1 module

Internal control unit

- Allows the user to select the desired setting
- Supplied with LED
- Soft Alu

General characteristics

Hotel equipment - Arteor wiring devices round version

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

CAT. N° 5 722 08

**BUZZER ARTEOR 230 V - 2 ROUND MODULES - WHITE**

Pack (number of units)	10
Volume (dm ³)	1,581
Weight (g)	493,00

Product characteristics

Buzzers
230 V - 2 modules

- White

General characteristics**Hotel equipment - Arteor wiring devices round version**

- Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

 **Catalogue pages & additional information**

- [Description page \(p.441\)](#)

CAT. N° 5 722 48

**BUZZER ARTEOR 230 V - 2 ROUND MODULES -
MAGNESIUM**

Pack (number of units)	10
Volume (dm ³)	0,758
Weight (g)	491,00


Product characteristics

Buzzers
230 V - 2 modules
■ Magnesium

General characteristics


Hotel equipment - Arteor wiring devices round version
■ Mechanisms supplied with rocker plates, to be equipped with support frames and plates

Documentation

 **Catalogue pages & additional information**
■ [Description page \(p.441\)](#)

Céliane™ - Arteur™
LED lighting - Reading light

Cat. No(s): 0 676 56/57 - 5 722 56/57 - 5 727 56/57

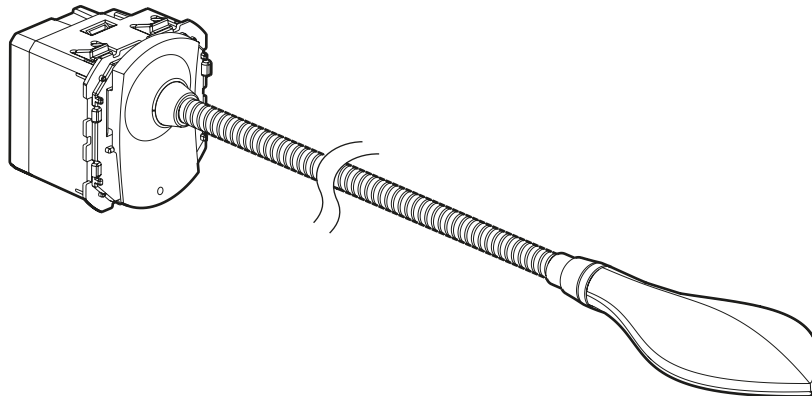

0 676 56/57

1. USE


For specific directionnal lighting in harmony with Céliane or Arteur wiring devices ranges.

2. RANGE


Description	Céliane		Arteur			
	White	Titane	White round	White square	Magnesium round	Magnesium square
Reading light: ideal for precise lighting headbed.	0 676 56	0 676 57	5 722 56	5 722 57	5 727 56	5 727 57

3. PREPARATION

P = 40 mm

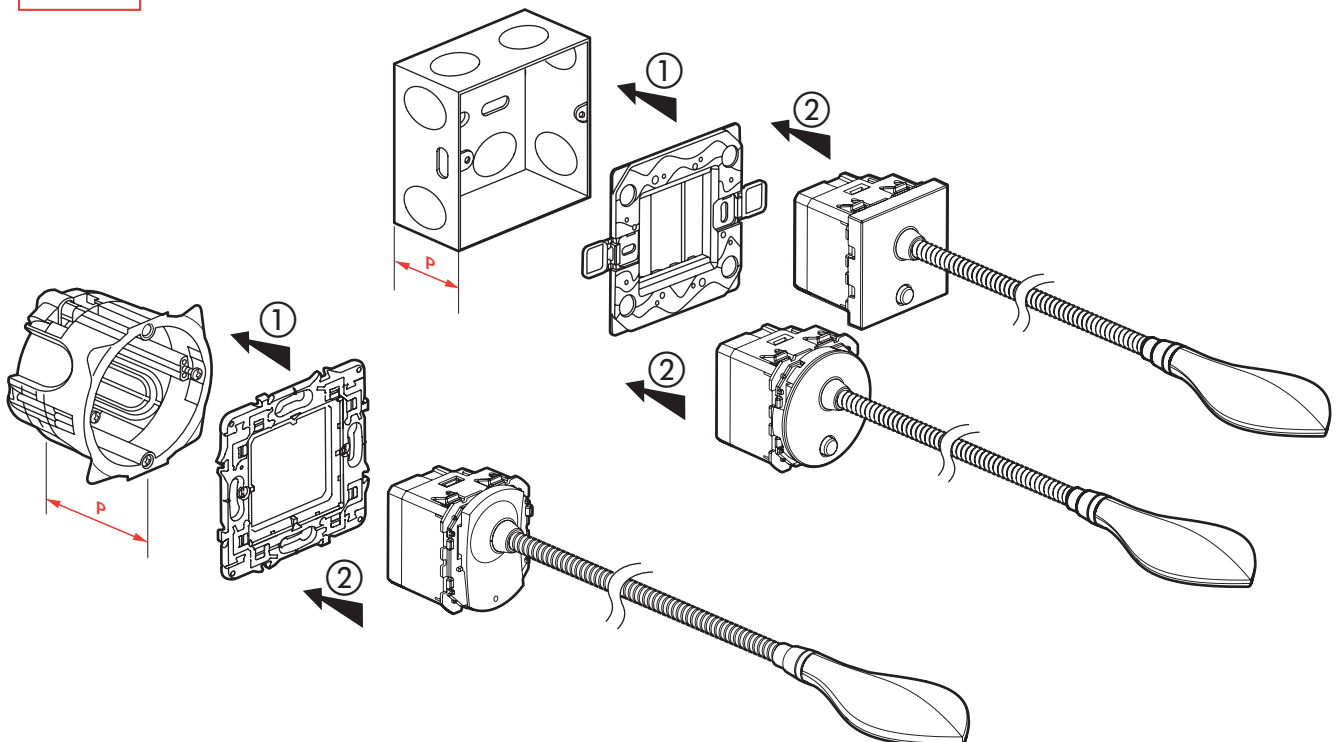

4. OVERALL DIMENSIONS (mm)

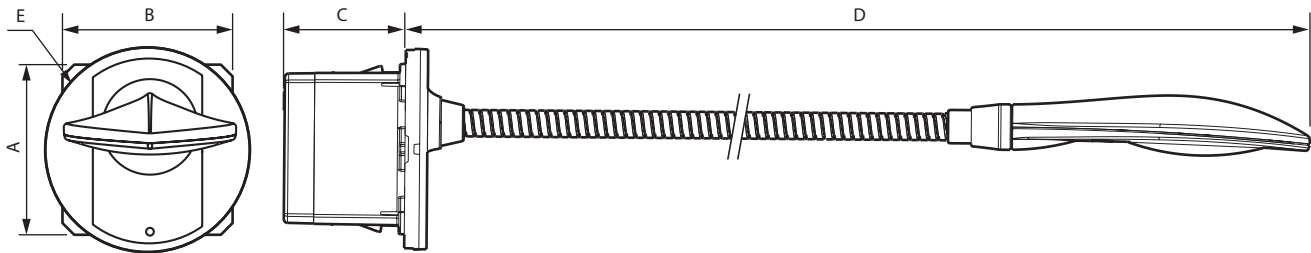

Cat. Nos	A	B	C	D	Ø E	□ E
0 676 56 - 0 676 57	45	45	32	330	53	-
5 722 56 - 5 727 56	45	45	32	330	45	-
5 722 57 - 5 727 57	45	45	32	390	-	45 x 45

5. CONNECTION

Terminal capacity: 2 x 1.5 mm² or 2 x 2.5 mm²
 Connection type: with screws
 Screwdriver: Flat 3 mm
 Stripping length: 8 mm
 Tightening torque: 0.5 Nm

6. TECHNICAL CHARACTERISTICS

■ 6.1 Protection index

Penetration by solid bodies/liquid: IP 20 unassembled
 IP 40 assembled

Impact test: IK 04

■ 6.2 Material characteristics

Material:

- Cover: PC
 - Diffuser: PC
 - Painted cover, painted head reading light: ABS
 - Flexible: steel
- Halogen free.
 UV resistant.

Self-extinguishing:



- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

Voltage: 230 VAC
 Frequency: 50 Hz
 Current: 23 mA
 Luminous flux: 110 lm - Power input: 3.3 W
 Color temperature: 3,000 K, neutral white
 Product tested to 40,000 operations switching ON and OFF.
 Reading lights have their own controls "ON/OFF/DIMMING" integrated.

6. TECHNICAL CHARACTERISTICS (continued)

■ 6.4 Photoelectric characteristics

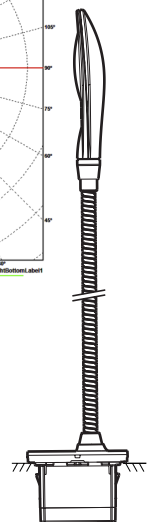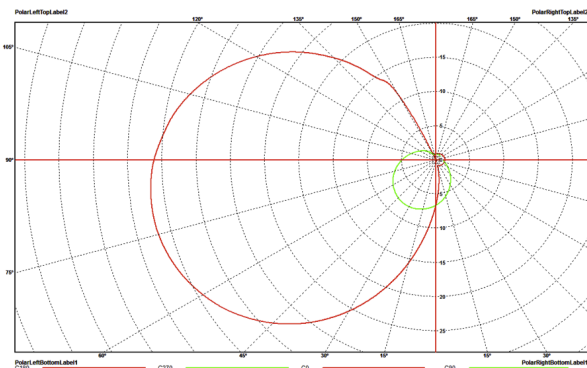

■ 6.5 Climatic characteristics

Storage temperature: - 25° C to + 45° C
 Use temperature: - 5° C to + 35° C

7. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

8. STANDARDS AND APPROVALS

IEC 60598-1
 IEC 60598-2-2
 IEC 61547
 IEC 60669-2-1