



## Arteor™ Mirror plates for british standard


Cat. No(s): 575 073/074/083/084/093/094/103/104/123/124/163/164  
575 203/204/213/214/543/544/553/554/563/564/613/614  
576 105/106/115/116/125/126/135/136/145/146/155/156  
576 165/166/175/176/185/186/195/196/205/206/215/216



575 213/214  
576 125/126



575 613/614  
576 115/116















575 073/074  
576 165/166

### 1. USE

Plates for covering mechanisms.

### 2. RANGE


	Designation	Finishes				Number of modules	Fixing method	Weight (g)
		White	Black	Red	Taupe			
	1 module plate square	575 204	575 203	576 106	576 105	1	With clips	27.5
	2 modules plate square	575 214	575 213	576 126	576 125	2	With clips	25.3
	2 modules plate round	575 614	575 613	576 116	576 115	2	With clips	36
	3 modules plate square	575 074	575 073	576 166	576 165	3	With clips	70
	3 modules plate round	575 544	575 543	576 156	576 155	3	With clips	73
	3 modules plate square 1 gang horizontal & vertical mounting	575 164	575 163	576 186	576 185	3	With clips	68
	3 modules plate round 1 gang horizontal & vertical mounting	575 564	575 563	576 176	576 175	3	With clips	72
	2 x 2 modules plate square	575 084	575 083	576 146	576 145	4	With clips	41
	2 x 2 modules plate round	575 554	575 553	576 136	576 135	4	With clips	42.7
	Plate for 13 A fused connection unit 1 gang	575 124	575 123	576 196	576 195	/	With clips	22
	Plate for 13 A twin switched socket outlet 2 gang	575 104	575 103	576 206	576 205		With clips	49
	Plate for 5 A and 13 A switched socket outlet 1 gang	575 094	575 093	576 216	576 215		With clips	31.5

# Arteor™

## Mirror plates for british standard

Cat. No(s): 575 073/074/083/084/093/094/103/104/123/124/163/164  
 575 203/204/213/214/543/544/553/554/563/564/613/614  
 576 105/106/115/116/125/126/135/136/145/146/155/156  
 576 165/166/175/176/185/186/195/196/205/206/215/216

### 3. OVERALL DIMENSIONS

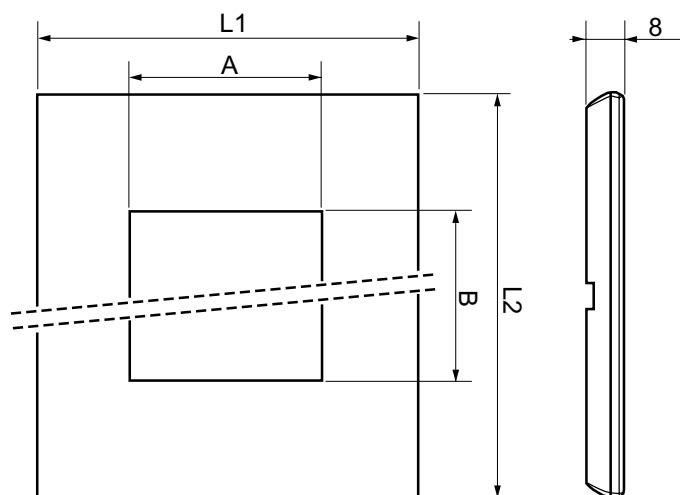

Cat. No.	L1	L2	A	B	C
575 073/074	157	92	68	45.4	8
575 083/084			2 x 45.4	2 x 45.4	
575 093/094	92				
575 103/104	157				
575 123/124	92				
575 163/164			45.4	68	
575 203/204			22.8	45.4	
575 213/214			45.4		
575 543/544	157		68		
575 553/554			2 x Ø 45.4		
575 563/564	92		45.4	68	
575 613/614			Ø 45.4		
576 105/106			22.8	45.4	
576 115/116			Ø 45.4		
576 125/126	157		45.4	45.4	
576 135/136			2 x Ø 45.4		
576 145/146			2 x 45.4	2 x 45.4	
576 155/156			68	45.4	
576 175/176	92		45.4	68	
576 185/186					
576 195/196					
576 205/206	157				
576 215/216	92				

### 4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g.: wall paper). Easy to remove with a screwdriver.  
 No flatness defect of more than 1.5 mm, in a periphery of 10 cm around the installed flush box.  
 Protection film must be removed only once site work is fully completed.

### 5. TECHNICAL CHARACTERISTICS

#### 5.1 Mechanical characteristics

Impact tests: IK 04

#### 5.2 Material characteristics

Front plate: polycarbonate  
 Under plate: polycarbonate  
 Surround: chromed Zamac

#### 5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C  
 Operating temperatures: - 5° C to + 50° C

### 6. CLEANING

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

#### 6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

#### 6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Surfanios.


### 7. SPECIAL USE

Arteor plates must not be painted.


# Arteor™

## Mirror plates for franco-belgian and german standard


Cat. No(s): 5 750 23/24/33/34/43/44/53/54/63/64  
 5 755 13/14/23/24  
 5 756 03/04  
 5 762 25/26/35/36/45/46/55/56/65/66/75/76/85/86  
 5 765 53/54/63/64



5 762 25/26  
5 765 53/54



5 756 03/04  
5 762 35/36



5 750 03/04  
5 762 35/36


### 1. USE

Plates for covering mechanisms

### 2. RANGE

	Designation	Finishes				No. of modules	Fixing method	Weight (g)
		White	Black	Red	Taupe			
	1 module plate square	5 765 53	5 765 54	5 762 26	5 762 25	1	with clips	27.5
	2 modules plates square	5 765 64	5 765 63	5 762 46	5 762 45	2	with clips	25.3
	2 modules plate round	5 756 04	5 756 03	5 762 36	5 762 35	2	with clips	36
	4 modules plate square	5 750 34	5 750 33	5 762 76	5 762 75	4	with clips	39.3
	2 x 2 modules plate square	5 750 24	5 750 23	5 762 66	5 762 65	2 x 2	with clips	38.5
	2 x 2 modules plate round	5 755 14	5 755 13	5 762 56	5 762 55	2 x 2	with clips	59.9
	6 modules plate square	5 750 44	5 750 43	5 762 86	5 762 85	6	with clips	59.5
	3 x 2 modules plate square	5 750 54	5 750 53			3 x 2	with clips	58.3
	3 x 2 modules plate round	5 755 24	5 755 23			3 x 2	with clips	90
	2 x 6 modules plate square horizontal mounting	5 750 64	5 750 63			2 x 6	with clips	114.9

## 3. OVERALL DIMENSIONS

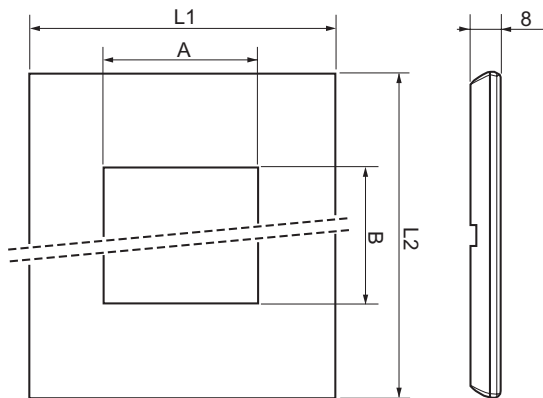

Cat. No.	L1	L2	A	B
5 750 23/24	157	92	2 x 45.4	2 x 45.4
5 750 33/34			90.6	45.4
5 750 43/44	135.8			
5 750 53/54	238	179	3 x 45.4	3 x 45.4
5 750 63/64			2 x 135.8	2 x 45.4
5 755 13/14	92	157	2 x Ø 45.4	
5 755 23/24	238	92	3 x Ø 45.4	
5 756 03/04	92		Ø 45.4	
5 762 25/26			22.8	45.4
5 762 35/36		Ø 45.4		
5 762 45/46	157	92	45.4	45.4
5 762 55/56			2 x Ø 45.4	
5 762 65/66	157	92	2 x 45.4	2 x 45.4
5 762 75/76			90.6	45.4
5 762 85/86	238		135.8	
5 765 53/54	157	92	22.8	45.4
5 765 63/64			45.4	

## 4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver.

No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box.

Protection film must be removed only once site work is fully completed.

## 5. TECHNICAL CHARACTERISTICS

## 5.1 Mechanical characteristics

Impact tests : IK 04

## 5.2 Material characteristics

Front plate: polycarbonate

Under plate: polycarbonate

Surround: chromed zamac

## 5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

## 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

## 6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

## 6.2 Resistance to hospital-type cleaning agents


Resistance to the following agents: Anios, Surfanios, Bactily sine, Hydrogen peroxyde (30%).

## 7. SPECIAL USE


Arteor plates must not be painted.

## Arteor™ Mirror plates for italian and US standard


Cat. No(s): 575 243/244/253/254/263/264/273/274/283/284/293/294  
575 303/304/323/324/633/634/643/644/653/654/663/664/673/674  
576 415/416/425/426/435/436/445/446/455/456/465/466  
576 615/616/625/626/635/636/645/646/655/656/665/666/675/676/723/724/735/736



575 253/254  
576 435/436

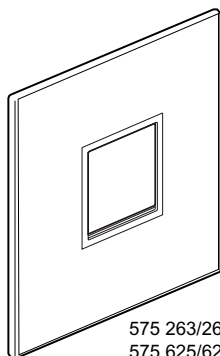

575 263/264  
575 625/626



575 633/634  
576 425/426

### CONTENTS

Page

1. Use.....	1
2. Range.....	1-2
3. Overall dimensions.....	3
4. Mounting.....	3
5. Technical characteristics.....	3
6. Cleaning.....	3
7. Special use.....	3







### 1. USE

Plates for covering mechanisms.

### 2. RANGE

	Designation	Finishes				Number of modules	Fixing method	Weight (g)
		White	Black	Red	Taupe			
	1 module plate square (2" x 4")	575 244	575 243	576 416	576 415	1	With clips	130
	1 module plate square Vertical (2" x 4")	576 724	576 723	576 736	576 735	1	With clips	130
	2 modules plate square (2" x 4")	575 254	575 253	576 436	576 435	2	With clips	125
	2 modules plate square (4" x 4")	575 264	575 263	576 626	576 625	2	With clips	180
	2 modules plate round (2" x 4")	575 634	575 633	576 426	576 425	2	With clips	129
	2 modules plate round (4" x 4")	575 644	575 643	576 616	576 615	2	With clips	180
	3 modules plate square (2" x 4")	575 274	575 273	576 456	576 455	3	With clips	120
	3 modules plate square (4" x 4")	575 284	575 283	576 646	576 645	3	With clips	170

2. RANGE (suite)


	Designation	Finishes				Number of modules	Fixing method	Weight (g)
		White	Black	Red	Taupe			
	3 modules plate round (2" x 4")	575 654	575 653	576 446	576 445	3	With clips	120
	3 modules plate round (4" x 4")	575 664	575 663	576 636	576 635	3	With clips	170
	4 modules plate square (4" x 4")	575 294	575 293	576 656	576 655	4	With clips	149
	2 x 3 modules plate square (4" x 4")	575 304	575 303	576 676	576 675	6	With clips	147
	2 x 3 modules plate round (4" x 4")	575 674	575 673	576 666	576 665	6	With clips	157
	Plate for 4 modules socket	575 324	575 323	576 466	576 465	4	With clips	141

# Arteor™

## Mirror plates for italian and US standard

Cat. No(s): 575 243/244/253/254/263/264/273/274/283/284/293/294  
 575 303/304/323/324/633/634/643/644/653/654/663/664/673/674  
 576 415/416/425/426/435/436/445/446/455/456/465/466  
 576 615/616/625/626/635/636/645/646/655/656/665/666/675/676/723/724/735/736

### 3. OVERALL DIMENSIONS

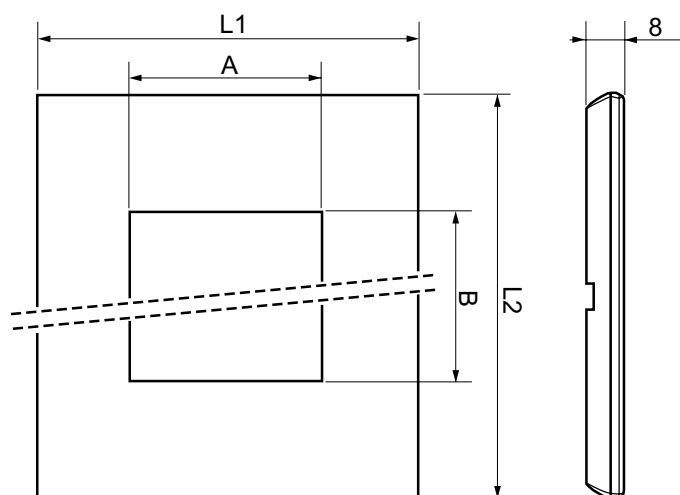

### 4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g.: wall paper). Easy to remove with a screwdriver. No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box. Protection film must be removed only once site work is fully completed.

### 5. TECHNICAL CHARACTERISTICS

#### 5.1 Mechanical characteristics

Impact tests: IK 04

#### 5.2 Material characteristics

Front plate: PMMA  
 Under plate: polycarbonate  
 Surround: chromed Zamac

#### 5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C  
 Operating temperatures: - 5° C to + 50° C

### 6. CLEANING

Surface cleaning with a cloth. Do not use: acetone, tar remover, trichloroethylene.

#### 6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

#### 6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Surfanios.

### 7. SPECIAL USE

Arteor plates must not be painted.

Cat. No.	L1	L2	A	B	
575 243/244	92	127	45.4	22.8	
575 253/254				45.4	
575 263/264	127			45.4	
575 273/274	92			68	
575 283/284	127			68	
575 293/294				90.6	
575 303/304	92		2 x 45.4	2 x 68	
575 323/324			45.4	90	
575 633/634	92		127	Ø 45.1	
575 643/644	127			45.4	68
575 653/654	92				
575 663/664	127	2 x 45.4		2 x 68	
575 673/674		45.4		22.8	
576 415/416	92	Ø 45.1			
576 425/426		45.4		45.4	
576 435/436				68	
576 445/446				90	
576 455/456		127		Ø 45.1	
576 465/466				45.4	
576 615/616				45.4	
576 625/626		127		45.4	45.4
576 635/636					68
576 645/646					90.6
576 655/656	2 x 45.4			2 x 68	
576 665/666	92			22.8	45.4
576 675/676					
576 723/724	92				
577 735/736					