

FLOOR STANDING CABINET WITH COMBINATION LOCK




The Norden floor standing cabinets designed for communication rooms and data centers. The smart design and professional engineering provides easy installation and maintenance. Comply with ANSI/EIA RS-310-D, IEC 297-2, DIN 41491, PART 1, DIN 41497, PART 7, IEC 60297-2, ETSI standards.

FEATURES

- Intelligent design ensures easy installation
- Cable entry through bottom and top panel
- Removable side panel with key lock provides easy maintenance
- Combination lock for front door
- 180 degree turning angle for front door
- Front perforated curved door and back perforated door
- 19" installation
- Adjustable feet and heavy duty castors

| | |
|--------------------|--|
| Material | SPCC cold rolled steel |
| Deg. of Protection | IP20 |
| Surface finish | Degreasing, phosphoric, powder coated |
| Loading capacity | 800 KGS |
| Material thickness | Mounting profile: 2.0 mm, Angel: 1.5 mm, Other: 1.2 mm |

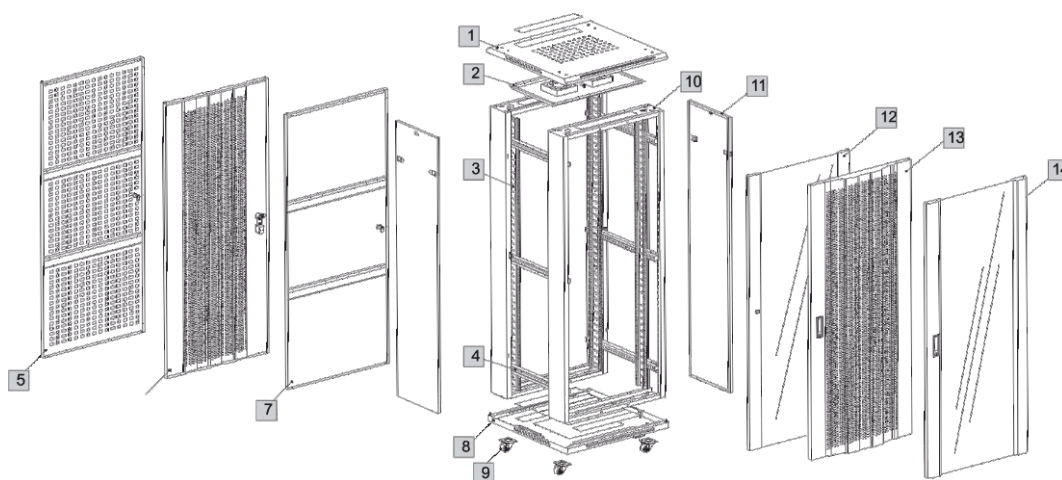

SAMPLE STRUCTURE

- | | | |
|--------------------------------|----------------------------------|----------------|
| 1. Top cover | 6. High-density vented rear door | 10. Frame |
| 2. Fan unit | 7. Steel door without hole | 11. Side panel |
| 3. Mounting profile | 8. Bottom panel | 12. Front door |
| 4. Mounting angle | 9. 2" heavy duty castor | 13. Front door |
| 5. Rear door with square holes | | 14. Front door |

FLOOR STANDING CABINET WITH COMBINATION LOCK

DOOR TYPE



Front Perforated (Curved)



Back Perforated

ACCESSORIES

| Accessories | Material Of Construction | Surface Coating & Colour | Quantity |
|--|-------------------------------|--------------------------|----------|
| Top cover | 1.2 mm SPCC cold rolled steel | Powder coating | 1 piece |
| Combination Lock | - | Black | 2 piece |
| Mounting Angle, 4 Pcs for lower 32U | 1.5 mm SPCC cold rolled steel | Powder coating | 6 piece |
| Perforated curved Front door | 1.2 mm SPCC cold rolled steel | Powder coating | 1 piece |
| 3" heavy duty castors | - | - | 4 piece |
| Mounting Profile | 2.0 mm SPCC cold rolled steel | Powder coating | 4 piece |
| Small round Lock with 2 keys | | Nickel coating | 2 piece |
| Frame | 1.2 mm SPCC cold rolled steel | Powder coating | 2 piece |
| M6 Square nut, 40 sets for upper 32U | steel | Zinc Colour | 20 piece |
| M6 B head screw, 40 sets for upper 32U | steel | Zinc Colour | 20 piece |
| Side Panel | 1.2 mm SPCC cold rolled steel | Powder coating | 2 piece |
| Square hole rear door, square vent | 1.2 mm SPCC cold rolled steel | Powder coating | 1 piece |
| Bottom panel | 1.2 mm SPCC cold rolled steel | Powder coating | 1 piece |
| Allen wrench | steel | Black Colour | 1 piece |
| M12 adjustable feet | - | - | 4 piece |

ORDERING INFORMATION

| Part Number | Description | Capacity (U) | Dimension(mm) |
|----------------|--|--------------|-------------------|
| 1320-428133X | 42U 800 x 1000 Cabinet Front (Curved) Single Perforated and rear Single perforated Door with Combination Lock | 42 | 800 x 1000 x 2055 |
| 1320-428133X-D | 42U 800 x 1000 Floor Standing Cabinet Front (Curved) Single Perforated and Rear Single Perforated Door with Combination Lock and Door Sensor | 42 | 800 x 1000 x 2055 |
| 1320-428Z44X | 42U 800 x 1070 Cabinet Front (Curved) double Perforated and rear double perforated door with Combination Lock | 42 | 800 x 1070 x 2055 |

PACKING INFORMATION

| Part Number | Packing Qty. | Packing Mode | N.W (kg) | G.W (kg) | Gross Volume* [CBM] |
|----------------|------------------|--------------------------|----------|----------|---------------------|
| 1320-428133X | 4 x Flat Packing | Carton Box | 133.0 | 143.8 | 0.805 |
| 1320-428133X-D | 5 | Flat packing, Carton box | 144.0 | 151.0 | 0.72 |
| 1320-428Z44X | 5 Flat packing | Flat packing | 164.0 | 154.0 | 0.61 |