


RISER ENCLOSURE

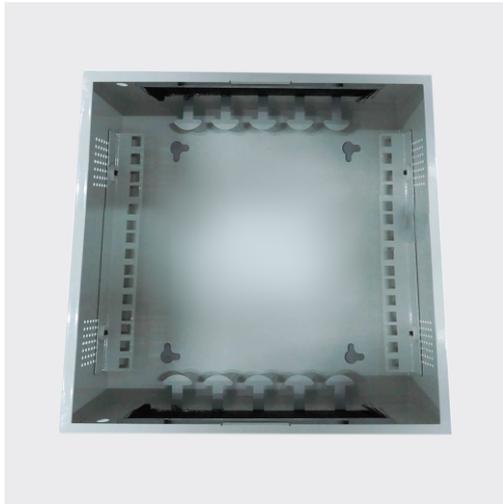


The Norden wall enclosures finds application for various network products in more than one locations. The adaptability to fit different applications for cabling designs, these enclosures is used for both fibre or copper within a limited space. These enclosures are suitable for risers, equipment rooms and remote locations. The riser enclosure is mounted on two DIN rail bars and has brush strip entry points at top and bottom.

FEATURES

Model	Residential
Type of profile rail	DIN
Number of doors	1
Dimension	300x300x100 mm
With roof plate	Yes
With front door	Yes
Material	Steel
Type of surface	Powder coated
Colour Grey	White
IP rating	IP20
Material thickness	1.2mm
Material coating	Powder Coating
Operating temperature	-40°C to +60°C
Integrated tie points	Top/Bottom

PRODUCT DRAWING

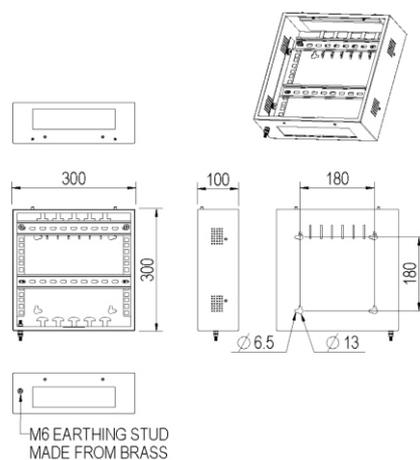

RISER ENCLOSURE

ACCESSORIES

Accessories	Information	Quantity
Nylon cable tie	200mm x 4mm	10
Excel velcro Tie	285mm x 20mm	4
Twist tie	4	4
Removable / lockable door		1
Port identification label		1
Din rail mounting profiles	(100-653 only)	2
M6 earthing stud		1
Cable entry /exit	Brush strip	

ORDERING INFORMATION

Part Number	Description
13R1-3B3J20X	300x300x100 Riser Enclosure

X: R1(RAL 9004), R2(RAL 7035), R3(RAL 9010)