

WALL MOUNT CABINET SINGLE SECTION - ES




The Easycab range of wall cabinets designed for home/office environment. The cabinet's structure is welded and painted with electro static powder coated finish. Easycab is available in different sizes.

FEATURES

- Easy installation
- Standing or wall mounting installation
- Cable entry through bottom and top panel
- 120 degree turning angle for front door
- Tempered front glass lockable door
- Welded frame
- Easy mountable back plate
- 10" installation, 3U Mesh Panel[Adjustable], Mounting Rails[Adjustable]

| | |
|----------------------|---------------------------------------|
| Material | SPCC cold rolled steel |
| Degree of protection | IP20 |
| Surface finish | Degreasing, phosphoric, powder coated |
| Loading capacity | 20 KGS |

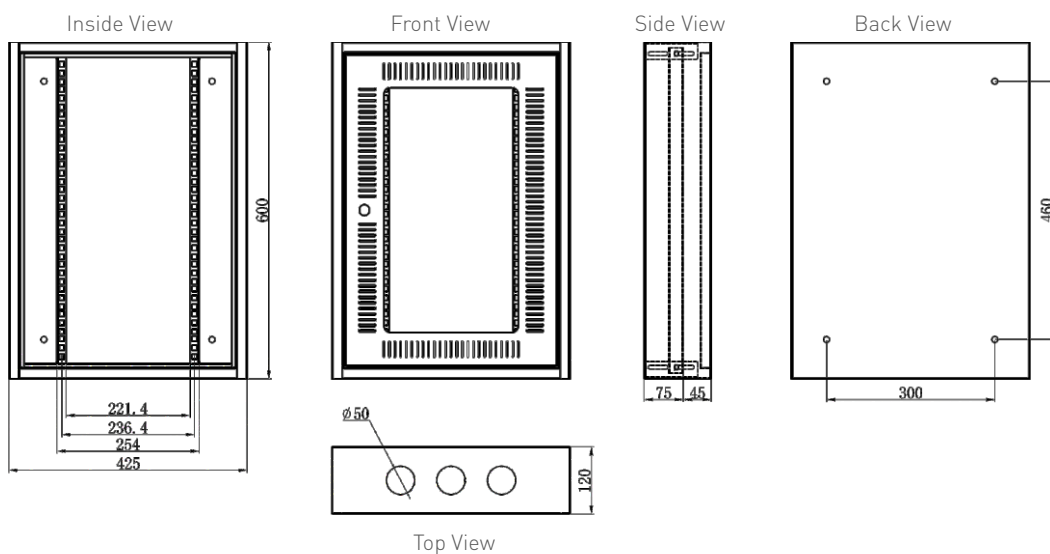

WALL MOUNT CABINET SINGLE SECTION - ES

ACCESSORIES

| Accessories | Material Of Construction | Surface Coating & Colour |
|-------------------|---|--------------------------|
| Front glass door | 4 mm toughened glass door /1.1mm SPCC cold rolled steel | Powder coating |
| Cable entry cover | 1.1mm SPCC cold rolled steel | Powder coating |
| Mounting Plate | Perforated Back plate / 1.1mm SPCC cold rolled steel | Powder coating |
| Lock with 2 keys | - | - |
| Frame | 1.1mm SPCC cold rolled steel | Powder coating |

ORDERING INFORMATION

| Part Number | Description | Capacity (U) | Dimension (mm) |
|--------------|--|--------------|-----------------|
| 1311-06D110X | 06U 400 x 120 Single Section ES Cabinet F / Glass door | 06 | 400 x 120 x 400 |
| 1311-063J10X | 06U 300 x 100 Single Section ES Cabinet Front Glass Door | 06 | 300 x 100 x 400 |
| 1311-124110X | 12U 425 x 120 Single Section ES Cabinet F / Glass door | 12 | 425 x 120 x 600 |
| 1311-12VJ10X | 12U 450 x 100 Single Section ES Cabinet Front Glass door | 12 | 450 x 100 x 600 |
| 1311-12V110X | 12U 450 x 120 Single Section ES Cabinet Front Glass door | 12 | 450 x 120 x 600 |
| 1311-12V210X | 12U 450 x 150 Single Section ES Cabinet Front Glass door | 12 | 450 x 150 x 600 |

X: R1(RAL 9004), R2(RAL 7035), R3(RAL 9010)