


2MP PTZ DOME CAMERA



ENV-HPT5Z-150R-90

FEATURES

25X Optical Zoom
Smart IR Up to 150 m
ONVIF Profile (S, G, T, M)
Triple Stream
Audio and Alarm Support
PoE+, IP67

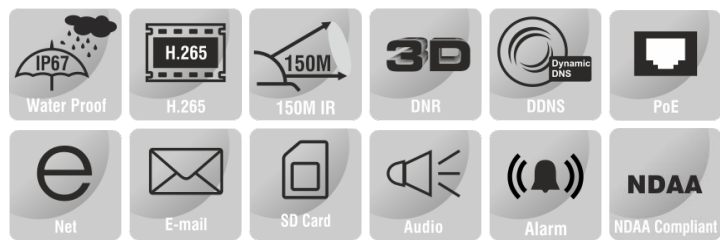

SPECIFICATION

MODEL	Model No.	ENV-HPT5Z-150R-90
	Type	2MP PTZ DOME CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	Dual IR Cut Filter with Auto Switch
	Lens Type	Motorized Zoom Lens
	Focal Length	4.5 ~ 112.5 mm (Optional 4.8 ~ 120 mm)
	Focus	Auto / Semi Auto / Manual
	Iris Type	P Iris, Auto/ Manual
	Angle of View (H)	64.4° ~ 2.7° (Optional 58.5° ~ 2.8°)
	Angle of View (V)	41.8° ~ 1.7° (Optional 33.2° ~ 1.5°)
	Angle of View (D)	76.5° ~ 3.2° (Optional 67.2° ~ 3.1°)
	Aperture	F1.5 ~ F3.8
	Optical Zoom	25X
	Digital Zoom	16X
	Zoom Speed	<5s
	Electronic Shutter	1s ~ 1/100,000s, Auto/Manual
	Min. Illumination	Color: 0.001 lux @ F1.5, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR, Auto / Manual
	S/N Ratio	≥60 dB
	Defog	Smart Defog
	WDR	120 dB
	Smart IR	Up to 150 m
	IR LEDs	6
	Wavelength	850 nm

2MP PTZ DOME CAMERA



ENV-HPT5Z-150R-90

MODEL	Model No.	ENV-HPT5Z-150R-90
	Type	2MP PTZ DOME CAMERA
DORI	Lens	4.5 ~ 112.5 mm (Optional 4.8 ~ 120 mm)
	Detection	68.2 ~ 1630.0 m (Optional 72.5 ~ 1759 m)
	Observation	26.7 ~ 657.0 m (Optional 28.6 ~ 709.7 m)
	Recognition	13.7 ~ 325.8 m (Optional 13.5 ~ 352.2 m)
	Identification	6.9 ~ 162.9 m (Optional 5.8 ~ 175.0 m)
VIDEO	Max. Resolution	1920×1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920×1080, 1280×720, 704×480, 640×480) @ 30fps, (1920×1080, 1280×720, 704×576, 640×480) @ 25fps Sub Stream: (704×480, 704×240, 640×360, 352×240) @ 30fps, (704×576, 704×288, 640×360, 352×288) @ 25fps Third Stream: (352×240) @ 30fps, (352×288) @ 25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate, SVC
	EIS	Supported
	Video Bit Rate	32 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	N/A
	HLC	Supported
	BLC	Supported
	OSD	Up to 5 regions
	OSD Type	Title, Week, Date, Time, Text with Different Colors and Adaptable Sizes (16×16, 24×24, 32×32, 48×48, 64×64), Image overlay
	ROI	Up to 7 regions
	Privacy Mask	Up to 24 regions
	Heatmap	N/A
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_D, AAC_LC
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	1/1
	Audio Voltage	Audio input, level 2.0~2.4V, Input Impedance 1 Kohms; Audio Output Impedance 600 ohms
	Built-in Mic	N/A
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Abnormal Video & Audio Detection, People Counting, Human and Vehicle Classification
	Alarm Management	Motion Detection, Tampering (Masking), IP Address Conflict, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Auto Tracking	N/A
	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTMP, PPPoE, NTP, UPnP, SMTP, SSL, TLS1.2, IGMP, QoS, 802.1x, Unicast, Multicast, ARP, SNMP, SFTP, P2P
	Security	AES 128 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), HTTPS Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Wi-Fi	N/A
	Alarm I/O	1/1
	Alarm Voltage	Input (switch type), Output (≤24V DC, Current ≤1A)
	USB	N/A
	Edge Storage	Micro SD Card Slot, Up to 512 GB
	ANR	Supported
	Built-in Speaker	N/A
	Heater	N/A
	Fan	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤7
	Web Language	15
	Client Application	EyeConnect


2MP PTZ DOME CAMERA



ENV-HPT5Z-150R-90

MODEL	Model No.	ENV-HPT5Z-150R-90
	Type	2MP PTZ DOME CAMERA
PAN AND TILT	Pan Range	0°~360° (Endless)
	Pan Speed	Pan Manual Speed: 0.1°/s ~ 200°/s, Pan Preset Speed: 240°/s
	Tilt Range	-16° ~ 90° (Auto flip)
	Tilt Speed	Tilt Manual Speed: 0.1°/s ~ 120°/s, Tilt Preset Speed: 180°/s
	Preset Accuracy	±0.4°
	3D Position	Supported
	Cruise	8 Scan , 16 Tour (32 presets per Tour)
	Pattern	8, each with 600s memory or 1000 orders
	Number of preset	500
	Power off Recovery	Supported
GENERAL	Power Supply	12V DC, PoE+ (IEEE 802.3at)
	Max. Power Consumption	≤22 W (IR ON), ≤9 W (IR OFF)
	Working Temperature	-40° ~ 70°C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS6000V
	Reset Button	Supported
	Accessories	Adaptor (included), Wall Mount Bracket (included)
	Optional Accessories	Pole Mount Bracket, Corner Bracket, Connector, Junction Box
	Dimensions	Φ161×276 mm
	Net Weight	3 kg

Dimension Unit : mm

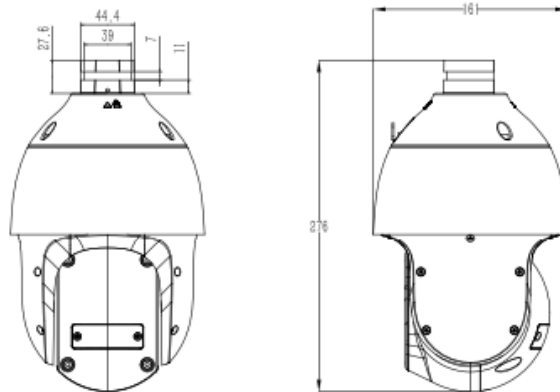

2MP PTZ DOME CAMERA



ENV-HPT5Z-150R-90

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HPT5Z-150R-90	2MP IR IP H.265 PTZ Dome Camera with 25X Optical Zoom, PoE+, WDR, SD Card Slot and 150m IR Support	1
ENB-BFPW66	Wall Mount Bracket for Norden 4" PTZ Camera (Included in device package)	1
ENB-BTPH66	Outer Corner Bracket for Norden PTZ Camera	1
ENB-BTPP66	Pendant Mount Bracket for Norden PTZ Camera	1
ENB-BTPV66	Pole Mount Bracket for Norden PTZ Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HPT5Z-150R-90	Carton Box	5.1	260×260×465

★Product specification and availability are subject to change without notice.