

5" Fireproof Ceiling speaker with fire dome,6W



DESCRIPTION

The NVS-EN6FDS is a fireproof ceiling speaker compliant with EN54-24 standards, designed for use in PA and VA systems. It includes a built-in 100V/70V transformer, a 5" full-range speaker unit, and selectable power taps of 1.5W, 3W, and 6W at 100V. The speaker features a metal fire dome, metal grille, and white metal baffle for fireproof applications. For safety, it comes with ceramic terminals, a thermal fuse, fire-resistant cable, and is easily installed with three spring clips.



FEATURES

- ◉ Fireproof ceiling speaker compliant with EN54-24 standards, designed for PA and VA systems
- ◉ 100V/70V transformer built-in for flexible integration into audio systems
- ◉ Quick installation design for in-ceiling mounting
- ◉ Features a 5" full-range speaker driver
- ◉ Power taps selectable at 1.5W, 3W, and 6W for 100V operation
- ◉ Equipped with a metal fire dome for increased fire safety
- ◉ For a clean and discreet look, it features a white metal grille, baffle, and fire dome
- ◉ For added protection, it includes fire-resistant cables, a ceramic terminal, thermal fuse, and a fire dome
- ◉ Three spring clips ensure quick and easy installation


Specifications	
Model	NVS-EN6FDS
Power Taps @100V	6W/3W/1.5W
Sensitivity	91dB
Max. SPL (Rated W/1M)	98dB
Frequency Response	110Hz - 14.5kHz
Speaker Driver	5" x 1 full range paper cone
Cutout Size	Ø 175mm
Dimension	Ø 200 x 105mm
Weight	0.9kg

5" Fireproof Ceiling speaker with fire dome,6W

Frequency Response & SPL Diagram:

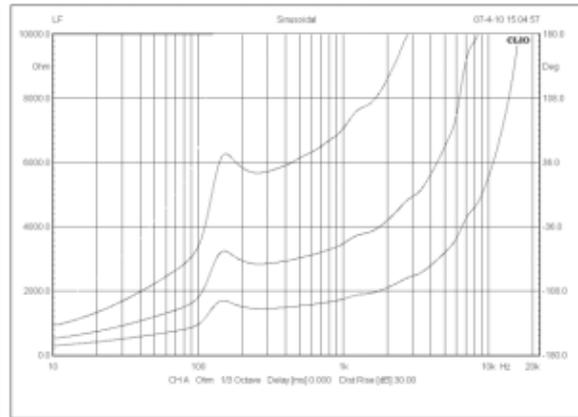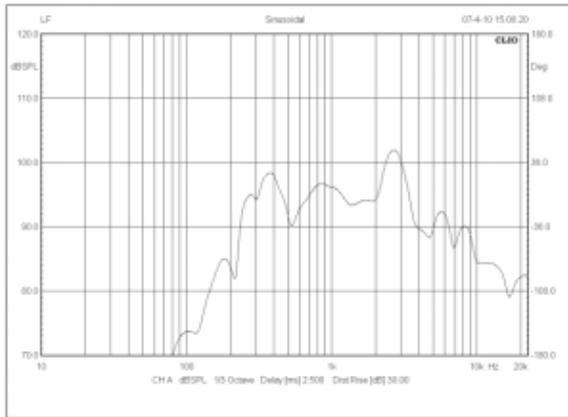

DIMENSION

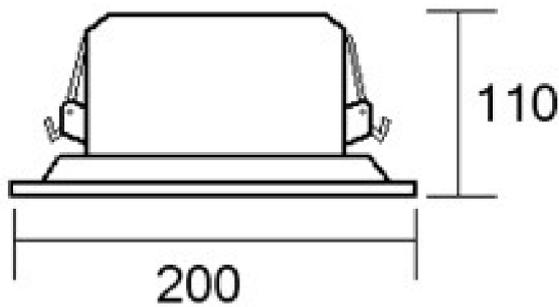

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN6FDS	5" Fireproof Ceiling speaker with fire dome,6W	01