

# 5" WALL MOUNT SPEAKER WITH FIRE DOME ,6W

WALL MOUNT SPEAKER



## DESCRIPTION

The NVS-EN6MTS is an EN54-24 certified commercial fireproof wall-mount speaker designed for use in voice alarm and public address (PA) systems, ideal for environments like schools, offices, hotels, and airports. It features a 5" full-range driver unit and offers selectable rated power output of 1.5W, 3W, or 6W at 100V. The speaker supports 100V or 70V line inputs with an integrated transformer, ensuring compatibility with various PA systems. Built with a ceramic connector, fire dome, 95°C fire-resistant cable, and thermal fuse, it ensures safety in the event of a fire. The steel enclosure, steel grille, and white fire dome provide durability and a clean aesthetic, while the quick wall or surface mount installation via screw holes makes it easy to set up in any environment.


## FEATURES

- ⦿ EN54-24 certified
- ⦿ 5" full-range driver for clear sound
- ⦿ Ceramic connector, fire dome
- ⦿ 95°C cable & thermal fuse
- ⦿ Durable steel enclosure & grille


Specifications	
Model	NVS-EN6MTS
Rated Power	6W
Power Taps	1.5W, 3W, 6W
Input Voltage	100V or 70V
Frequency Range	120Hz - 10kHz
Sensitivity	92dB±3dB
Max SPL	99dB±3dB
Driver	5" full-range speaker
Material	Steel casing, steel grille, and white fire dome
Mounting Method	Easy installation with hanging screw holes
Dimension	165×165×60mm
Weight	1.4kg

# 5" WALL MOUNT SPEAKER WITH FIRE DOME ,6W


## FREQ.RESPONSE (dB SPL,1W,1m)

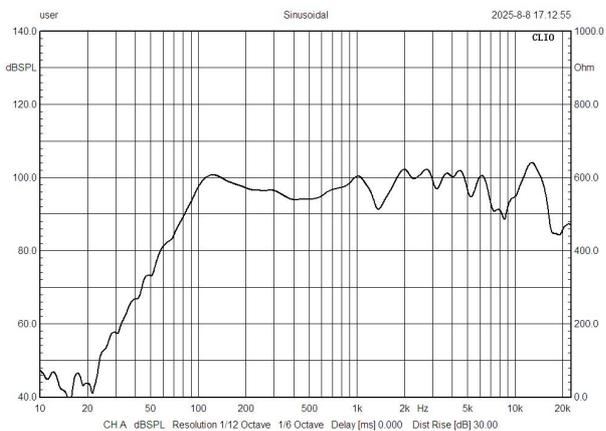

## IMPEDANCE

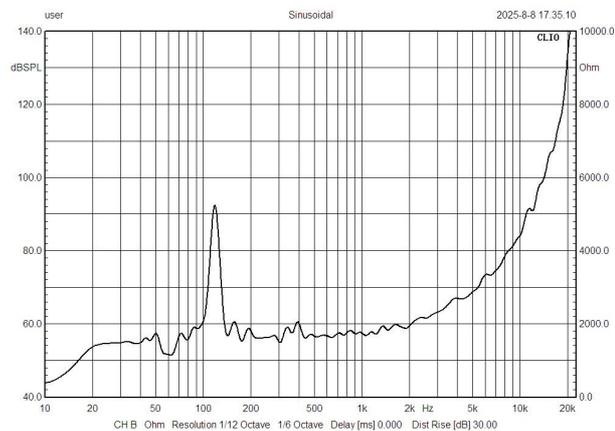

## DIMENSION

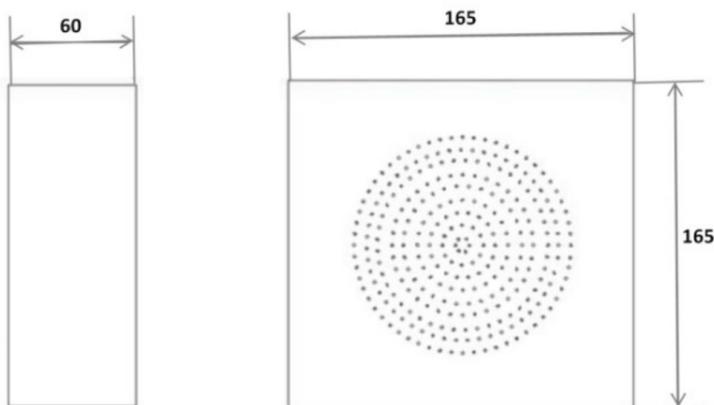

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN6MTS	5" WALL MOUNT SPEAKER WITH FIRE DOME ,6W	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01