

5.25" CEILING SPEAKER WITH FIRE DOME, 6W



DESCRIPTION

The NVS-EN6MCS is an EN54-24 certified commercial fireproof ceiling speaker with a transformer, designed for voice alarm and PA systems in schools, offices, hotels, and airports. It meets the EN54-24 EVAC standard and features a ceramic connector, fire dome rated for 95°C, and selectable power outputs of 6W, 3W, 1.5W, and 0.75W. The speaker is equipped with a 5.25" full-range unit, supports 100V or 70V line input, and has a metal enclosure, white metal grille, and red fire dome. Installation is quick and easy with the included spring clip for in-ceiling mounting.

FEATURES


- ◉ EN54-24 certified
- ◉ 5.25" full-range driver with power taps
- ◉ Ceramic connector & 95 °C fire dome for safety compliance
- ◉ Metal enclosure with white grille and fire dome
- ◉ Quick spring-clip ceiling installation

Specifications


Model	NVS-EN6MCS
Rated Power Output	6W
Powe Taps	6W, 3W, 1.5W, 0.75W
Line Input	100V or 70V
Frequency Response	130Hz to 15kHz
Sensitivity	92dB±3dB
Max SPL	99dB±3dB
Speaker Unit	5" full range paper woofer
Cutout Size	Ø 160mm
Material	Metal enclosure and grille in white, with red fire dome
Mounting	Quick in-ceiling installation using spring clips
Dimension	Ø 180 x 133mm
Weight	1.3kg

5.25" CEILING SPEAKER WITH FIRE DOME,6W


FREQ. RESPONSE
(dB SPL,1W,1m)

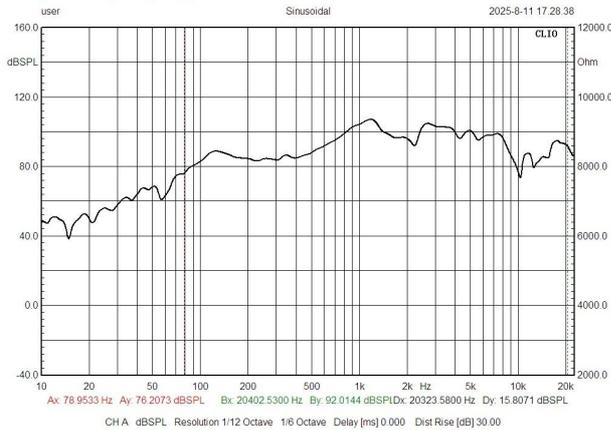

IMPEDANCE

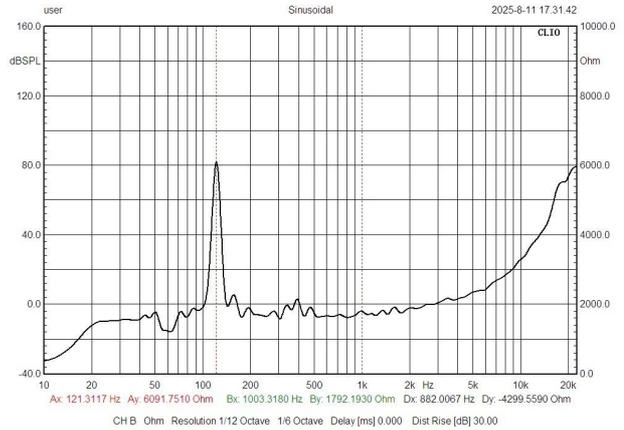

DIMENSION

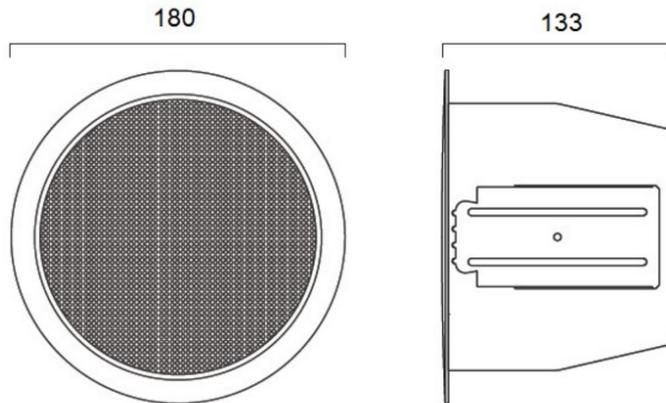

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN6MCS	5.25" CEILING SPEAKER WITH FIRE DOME,6W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01