

6.5" CEILING SPEAKER WITH FIRE DOME, 6W

CEILING SPEAKER



DESCRIPTION

The NVS-EN6FTS is an EN54-24 certified fireproof ceiling speaker designed for use in public address and voice alarm systems. It delivers clear audio through a full-range driver with multiple power tap options for 100V/70V installations. Built with a fire dome, ceramic connector, and durable metal enclosure, it ensures reliable performance and safety in demanding environments, while its spring-clip design allows quick and secure ceiling installation.


FEATURES

- ⦿ EN54-24 certified
- ⦿ 95 °C fire dome & ceramic connector
- ⦿ 6.5" full-range driver with taps
- ⦿ Metal enclosure, white grille, red fire dome
- ⦿ Quick spring-clip installation


Specifications	
Model	NVS-EN6FTS
Rated Power Output	6W
Line Input	100V or 70V
Power Taps	6W, 3W, 1.5W, 0.75W
Frequency Response	100Hz-18kHz
Sensitivity	92dB±3dB
Max SPL (@1W/m)	99dB±3dB
Speaker Unit	6.5" full-range speaker unit
Cutout Size	Ø175mm
Material	Metal enclosure, metal grille in white, and fire dome in red
Installation Method	In-ceiling mounting with spring clip
Dimension	Ø200×90mm
Weight	0.9kg

6.5" CEILING SPEAKER WITH FIRE DOME,6W


FREQ.RESPONSE
(dB SPL,1W,1m)

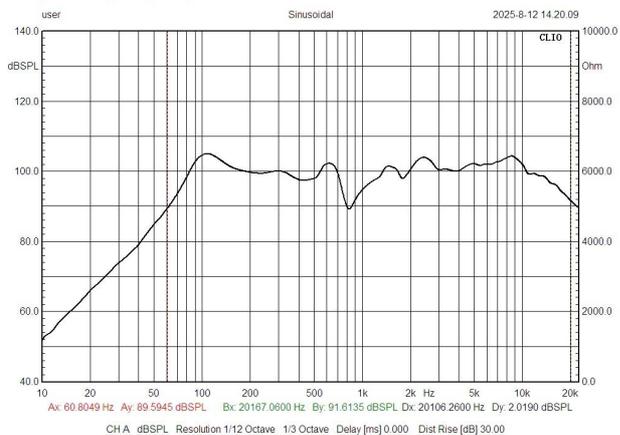

IMPEDANCE

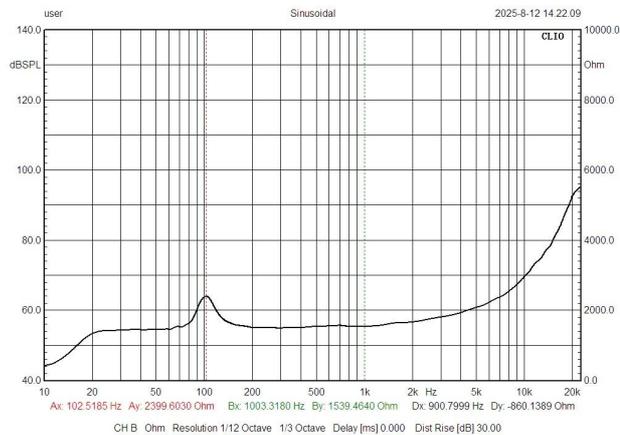

DIMENSION

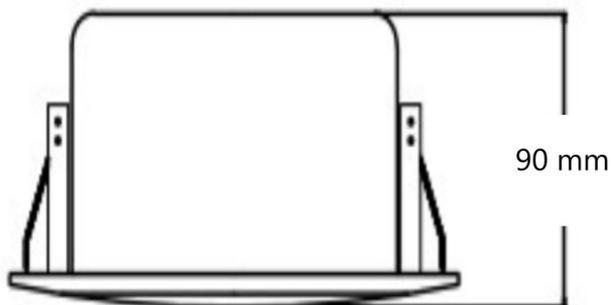

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN6FTS	6.5" CEILING SPEAKER WITH FIRE DOME,6W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01