

NVS-10380020CS

20W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION

CEILING SPEAKER



DESCRIPTION

The NVS-10380020CS is a Ceiling Speaker with built-in 70V/100V transformer and it can be switched between voltage terminal and the ohms terminal. The transmission takes place in a high-voltage, low-current environment. Low-current mode allows for longer transmission distances and parallel connections of many loudspeakers. The built-in 5" speaker driver has a wide frequency response (60-20,000Hz) and a 20W rated power output. It is made of high-quality engineering plastic, which assure a long-term durability and never out of shape and it will not color fade. It is an ideal choice for industrial and commercial applications like hotel, school, office and factory where background music and paging is required.


FEATURES

- ⦿ Multiple power tap option
- ⦿ Secure flush mount
- ⦿ ABS white plastic



Specifications	
Model	NVS-10380020CS
Rated Power	20W
Driver Size	5" x 1, 1" x1
Power Taping Options	5/10/20W
Input Voltage/Impedance	70/100V, 4-16Ω
Coverage Angle	175°
Connector type	Spring loaded terminal
Cutout Size	Ø170mm
Frequency Response	60Hz-20kHz
Sensitivity(1m,1w)	90dB±2dB
Maximum SPL(1m)	103dB±2dB
Operating temperature	-25°C~+57°C
Weight	2.9kg
Dimension	Ø198 x 224 mm

20W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION

FREQ. RESPONSE
(dB SPL, 1W, 1m)

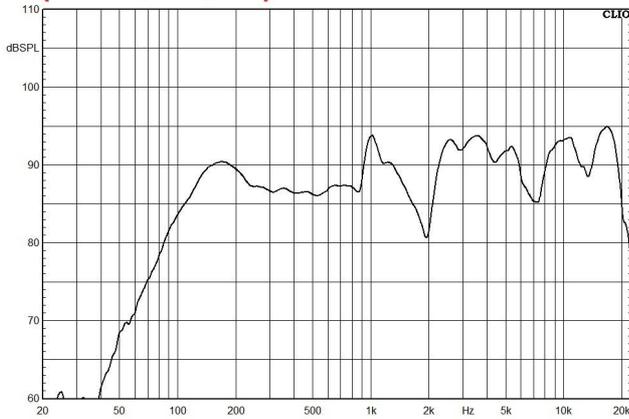


DISTORTION
(THD < 1.5% 1W, 1m, 100Hz-10kHz)

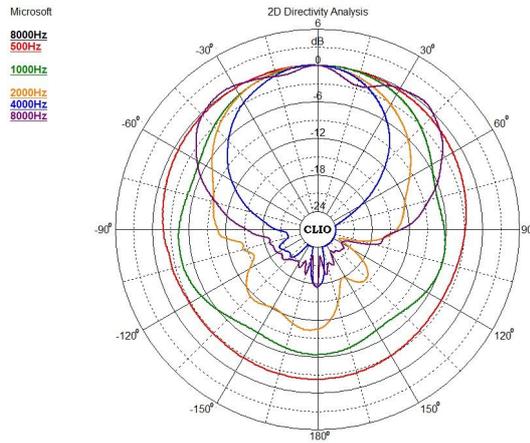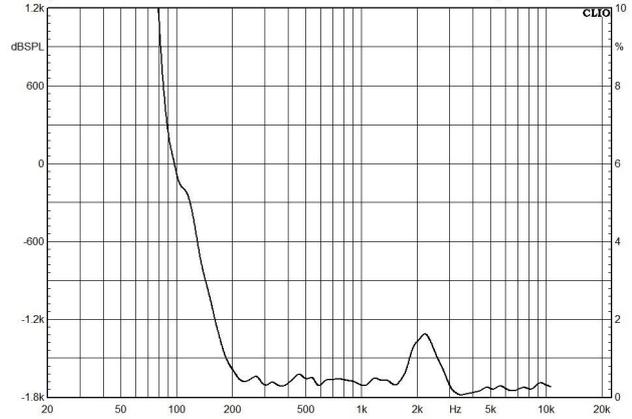

DIRECTIVITY PATTERN

20W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION

DIMENSION

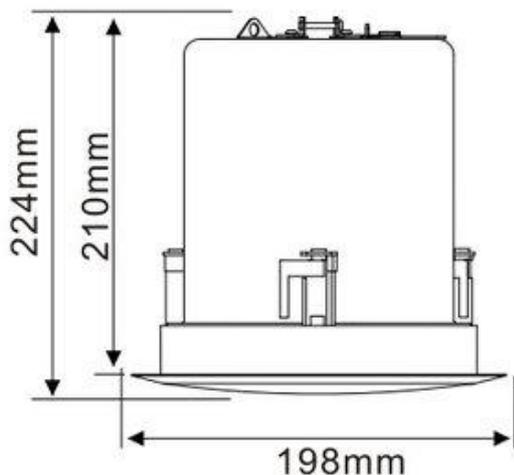

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10380020CS	20W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01