

PROFESSIONAL STEREO POWER AMPLIFIER 2x350W



DESCRIPTION

The NVS-20170702AM is a two-channel stereo amplifier with low distortion and high efficiency. Equipped with reliable protection of overvoltage, under-voltage, DC protection, short circuit and alarm functions. BTL connectivity is offered. It is appropriate for conference systems, meeting rooms, and daily activities.

FEATURES


- ⊙ Low Distortion
- ⊙ Stereo Operation
- ⊙ BTL Connectivity

Specifications

Model	NVS-20170702AM
Rated Output / Channel, 8Ω	230W
Rated Output / Channel, 4Ω	350W
Rated Output / BTL, 8Ω	700W
Frequency Response	20Hz-20kHz
Input Sensitivity	1.2dBV
Total Harmonic Distortion	<0.1% into 4Ω/1kHz
Signal to Noise ratio	100dB
Damping Factor	200:1 /8Ω,1kHz
Input CMRR	>90dB
Channel Impedance	4-16Ω
Voltage gain	>38dB
Weight	16.8kg
Dimension	484×446×88mm


PROFESSIONAL STEREO POWER AMPLIFIER 2x350W

FRONT PANEL

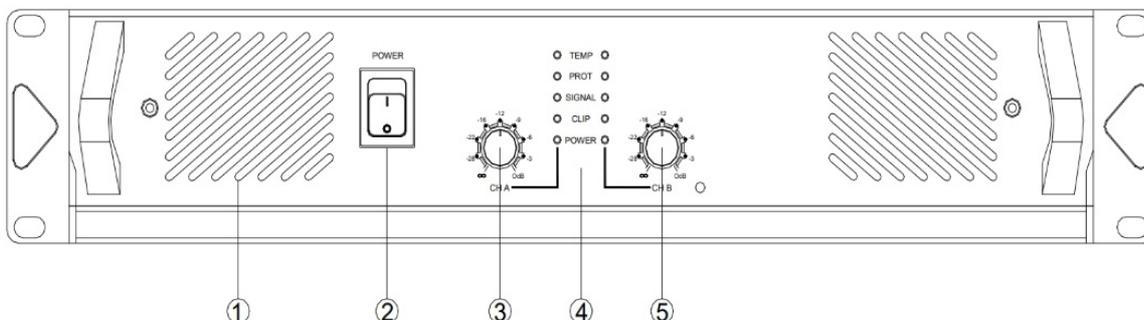

1. Cooling Fan
2. Power Switch
3. Channel A volume control knob (input attenuation)
4. Machine working status indicator
5. Channel B volume control knob (input attenuation)

REAR PANEL

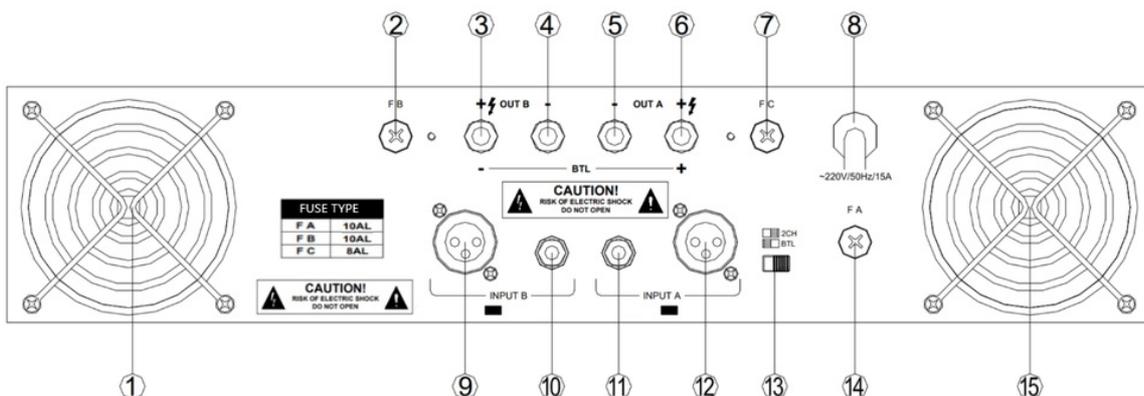

1. Cooling fan window
2. Channel B exchange fuse
3. Channel B amplifier output "+" class terminal
4. Channel B amplifier output "-" class terminal
5. Channel A amplifier output "-" class terminal
6. Channel A amplifier output "+" class terminal
7. Machine AC220V power input fuse holder
8. Machine AC220V power input cable
9. Channel B line audio input XLR interface
10. Channel B line audio input 6.35mm interface
11. Channel A line audio 6.35mm interface
12. Channel A line audio input XLR interface
13. Power amplifier working mode selection switch
14. Local AC220V power input fuse holder
15. Cooling fan window

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-20170702AM	PROFESSIONAL STEREO POWER AMPLIFIER 2x350W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01