

PTZ CONFERENCE CAMERA 20X OPTICAL ZOOM 2.10MP HDMI, SDI & USB

USB CONFERENCE DEVICE



DESCRIPTION

The NVS-UC600055CA is a PTZ conference Camera with 20x optical zoom 2.10MP HDMI, SDI,USB & RJ 45 Outputs. Even in low light or the extreme contrast of brightness and darkness in a conference room, the superior 20x optical zoom lens, outstanding white balance, and exposure mode delivers a clear image. The camera covers a wide shooting angle and achieves high-speed, quiet and precise positioning with smooth PTZ operations. 20x zoom with HDMI and SDI ideally suited for medium size conference rooms, it connects with any web conferencing system with Windows and Mac OS.

FEATURES


- ⦿ Crystal clear HD 1080P image quality
- ⦿ Support POE IEEE 802.3af
- ⦿ 1/2.8 inch high quality, 2.38 Mega Pixel (16:9) CMOS sensor
- ⦿ 20x optical zoom
- ⦿ USB, HDMI, SDI 3video outputs
- ⦿ Accurate, smooth and silent PTZ Movement
- ⦿ Preset: 10 via IR remote setting (256 via RS232)
- ⦿ Superior quality with Full Glass Lens Material
- ⦿ 55.8 ° wide field of view with no video distortion
- ⦿ Support ceiling mount, wall mount and tripod mount (Reverse mountable)
- ⦿ 2D and 3D NR for best video quality in different lighting conditions
- ⦿ Support Visca, Pelco-P, and Pelco-D protocol, RS232/RS485 Camera Control
- ⦿ Compatible with most leading video conferencing software and platform

Specifications	
Model	NVS-UC600055CA
Image Sensor	1/2.8 inch SONY CMOS
Effective pixel	2.38 mega pixel(16:9)
Horizontal Resolution	1080P60/50/30/25fps, 720P60/50/30/25fps
Signal standard	NTSC/PAL
Zoom	20x optical zoom

PTZ CONFERENCE CAMERA 20X OPTICAL ZOOM 2.10MP HDMI, SDI & USB

Minimum luminance	0.1 Lux
Focal length	F=5.5mm-110mm
Horizontal View Angle	55.8°(W)~3.2°(T)
Gain control	Auto
Focus	Auto
SNR ratio	≥50dB
Shutter speed	1/30s to 1/10000s (auto)
Preset position	User can set up to 255 presets (10 presets by IR remote) PELCO Protocol supports 256 presets
Pan/Tilt movement range	Pan: ±175°(max speed 100°/S) Tilt: ±90°(max speed 80°/S)
Control terminal	USB,RS-232, RS485,RJ45
Control Protocol	VISCA, PELCO-D, PELCO-P (RS-232, RS485)
Video output	USB, HDMI, SDI,RJ45
Video Encoding Format	H.264,H.265, MJPEG, YUY2
Noise Reduction	2D/3D
Baud rate	2400/4800/9600/38400bps
Decoder	Built-in
Address set	1-256
Installation	Support desktop, Tripod, Wall mount and Ceiling mount
Operating temperature	0°C~+50°C
Operating Humidity	0~95% RH
Power consumption	12 W
Power supply	DC 12V/2A
Net weight	1.5kg
Dimension (LxWxH)	181x184x174mm


FRONT PANEL

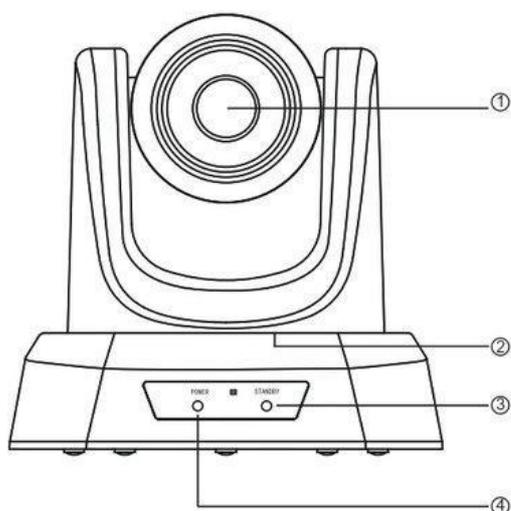

- ① Lens
- ② Pan & Tilt
- ③ Standby
- ④ Power

PTZ CONFERENCE CAMERA 20X OPTICAL ZOOM 2.10MP HDMI, SDI & USB

REAR PANEL

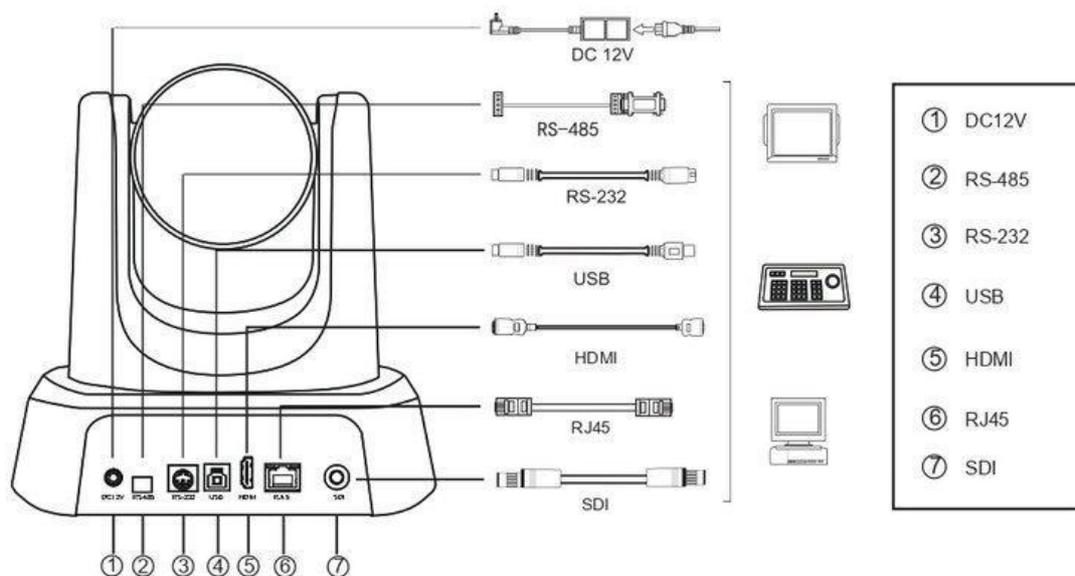

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-UC600055CA	PTZ CONFERENCE CAMERA 20X OPTICAL ZOOM 2.10MP HDMI, SDI & USB	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Remote Control	1
3M USB Cable	1
DC 12V Power Adapter	1
Wall Mount Bracket	1
Mounting Screws	4
User Manual	1