NVS-PA0002008PM

REMOTE PAGING MICROPHONE FOR 8x8 MATRIX SYSTEM

NORDEN®

DESCRIPTION

The NVS-PA0002008PM is a remote paging MIC for NVS-PA0001008MP digital audio matrix public address system. Each MIC control 8 zones. Each zone can realize independent control or one key switch and it supports multi-level extension.
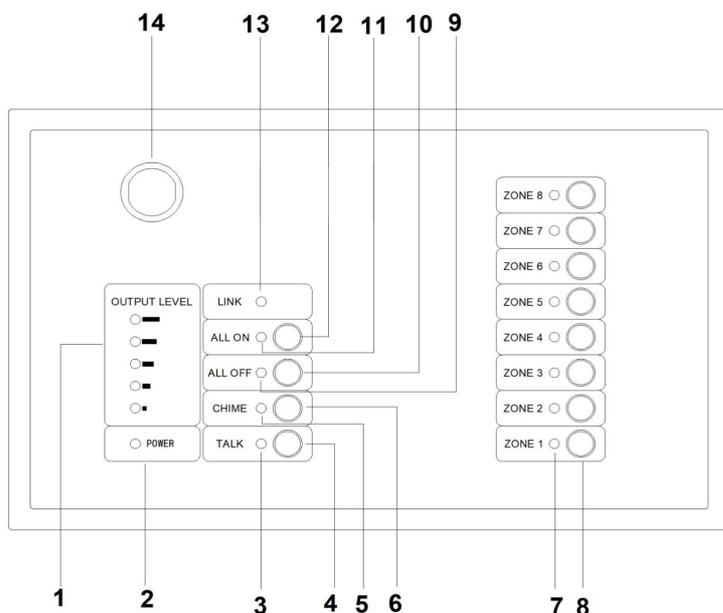
FEATURES

- Built-in Dual Chime Tones
- Support 8 zones
- Precise signal level indication
- Microphone and chime volumes are adjustable
- Utilizes an RJ45 interface for microphone connectivity
- Supports cascade linkage
- Equipped with Gooseneck microphone

Specifications

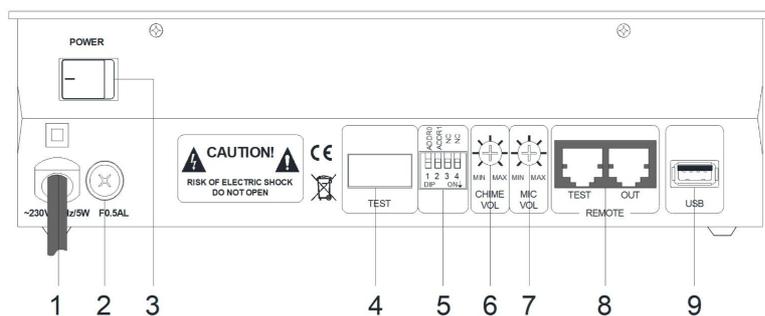| Model	NVS-PA0002008PM
MIC Frequency Response	100Hz~15kHz (±3dB)
Total Harmonic Distortion	<0.5% @1KHz
MIC1 input sensitivity	45±5 mV
Network port Input Sensitivity (Balance)	2000±100 mV
Network port Output Voltage (Balance)	2000±100 mV
Noise	<1.5mV
Chime Rated Output Level	≤1000 mV
Power Supply	AC 220V/50Hz
Weight	1.75 Kg
Dimension	231.5×145.5×67.5mm

REMOTE PAGING MICROPHONE FOR 8x8 MATRIX SYSTEM

FRONT PANEL

1. Output Level Indicator
2. Power indicator
3. TALK indicator
4. TALK switch button
5. CHIME indicator
6. CHIME switch button
7. Zone working indicator
8. Zone switch button
9. One button to turn off all zones indicators together
10. One button ALL OFF to turn off all zones together
11. One button ALL ON to turn on all zones together
12. One button to turn on all the zone indicators together
13. LINK indicator
14. Microphone interface

REAR PANEL

1. AC power input
2. AC fuse
3. Power switch
4. Extended interface
5. Connect host address
6. Chime volume adjustment knob
7. Microphone volume adjustment knob
8. Extended interfaces TEST and OUT
9. Test interface

NVS-PA0002008PM

REMOTE PAGING MICROPHONE FOR 8x8 MATRIX SYSTEM

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0002008PM	REMOTE PAGING MICROPHONE FOR 8x8 MATRIX SYSTEM	01

ACCESSORIES INFORMATION

Description	Standard Quantity
1500MM/Audio cable	01
Microphone stick	01
Microphone cap(black)	01
User Manual	01