

NVS-10010010WS



## WALL MOUNTED CURVED SPEAKER 10W



WALL MOUNT SPEAKER

### DESCRIPTION

The NVS-10010010WS is a Wall-Mounted Speaker with a 70V/100V transformer built in. The transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible. It is an ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


### FEATURES

- ◉ High-grade engineering plastic
- ◉ Easy Installation
- ◉ Curved design


Specifications	
Model	NVS-10010010WS
Rated Power	10W
Driver Unit	6.5"×1, 2"×1
Frequency Response	160Hz-18kHz
Power Taping Options	3/6/10W
Input Voltage/ Impedance	70V/100V
Sensitivity (1m,1w)	94dB±2dB
Max SPL (1m)	104dB±2dB
Coverage angle(HxV)	165°x90°
Input Connector	Push in terminal
Operating temperature	-25°C~+60°C
Material	ABS Plastic
Weight	1.75kg
Dimension	274x183mm

# WALL MOUNTED CURVED SPEAKER 10W


**FREQ. RESPONSE**  
(dB SPL, 1W, 1m)

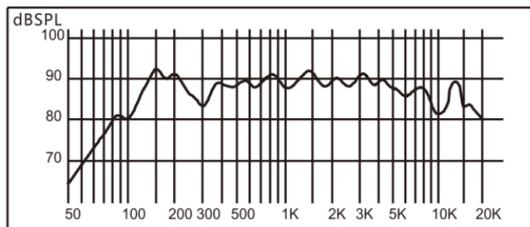

**DISTORTION**  
(THD < 5% 1W, 1m, 100Hz-10kHz)

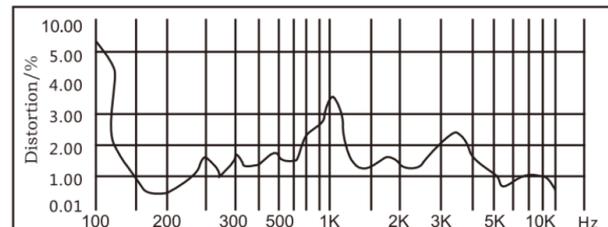

## DIMENSION

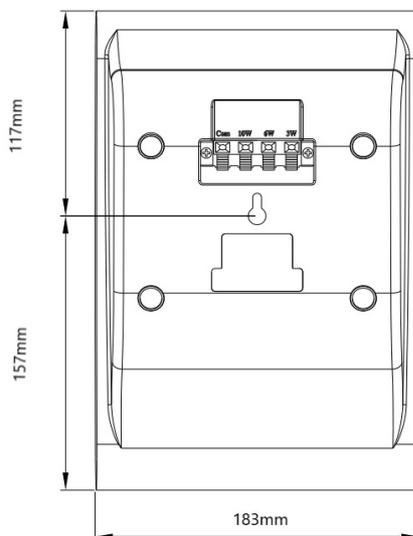

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10010010WS	WALL MOUNTED CURVED SPEAKER 10W	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01