


MS double sided busbar trunking components



51500361

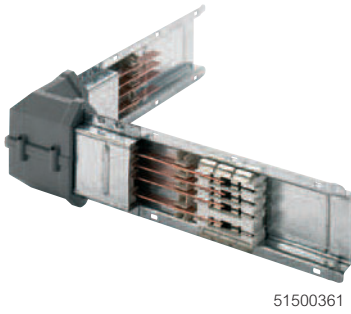

51500461



51511151



Dimensions and technical information p. 24-25

Conforms to BS EN 61439-6. Casing manufactured from Senzimir quality galvanised steel suitable for use as a protective earth IP 40 as standard, increasing to IP 55 with use of appropriate accessories

Pack	Cat. Nos.	Trunking components	Pack	Cat. Nos.	Trunking components (continued)										
		For changing the route of trunking, either horizontally or vertically													
		Horizontal elbows – right hand													
		Right and left elbows differ because of the position of junction blocks													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6					
Rating (A)	Weight (kg)														
63	1.6														
100	1.6														
160	2.6														
1	51530351														
1	51500361														
1	51520351														
		Horizontal elbows – left hand													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6					
Rating (A)	Weight (kg)														
63	1.6														
100	1.6														
160	2.6														
1	51530361														
1	51500362														
1	51520361														
		Vertical elbows – right hand													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.7</td> </tr> <tr> <td>160</td> <td>2.7</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.7	160	2.7					
Rating (A)	Weight (kg)														
63	1.6														
100	1.7														
160	2.7														
1	51530451														
1	51500461														
1	51520451														
		Vertical elbows – left hand													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>1.6</td> </tr> <tr> <td>100</td> <td>1.6</td> </tr> <tr> <td>160</td> <td>2.6</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	1.6	100	1.6	160	2.6					
Rating (A)	Weight (kg)														
63	1.6														
100	1.6														
160	2.6														
1	51530461														
1	51500462														
1	51520461														
		Right hand tees – male													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79					
Rating (A)	Weight (kg)														
63	2.29														
100	2.29														
160	3.79														
1	51530551														
1	51500561														
1	51520551														
		Right hand tees – female													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79					
Rating (A)	Weight (kg)														
63	2.29														
100	2.29														
160	3.79														
1	51530571														
1	51500563														
1	51520571														
		Left hand tee – female													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79					
Rating (A)	Weight (kg)														
63	2.29														
100	2.29														
160	3.79														
1	51530561														
1	51500562														
1	51520561														
		Left hand tee – male													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79					
Rating (A)	Weight (kg)														
63	2.29														
100	2.29														
160	3.79														
1	51530581														
1	51500564														
1	51520581														
		Crossovers													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63</td> <td>2.29</td> </tr> <tr> <td>100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63	2.29	100	2.29	160	3.79					
Rating (A)	Weight (kg)														
63	2.29														
100	2.29														
160	3.79														
1	51530651														
1	51500661														
1	51520651														
		Flexible elbow													
		For horizontal and vertical changes of direction up to 90°													
		Not available for 160 A rating													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63-100</td> <td>2.29</td> </tr> <tr> <td>160</td> <td>3.79</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63-100	2.29	160	3.79							
Rating (A)	Weight (kg)														
63-100	2.29														
160	3.79														
1	51511261														
1	51521261														
		Feed units													
		End feed units IP 55													
		IP 55 protection as standard. Supplied with cable clamp and terminals for 35 mm (MS 63/100) and 70 mm (MS 160) cables													
		Switched-end feed units are also available with in-line bus switches on request													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>Right 63-100</td> <td>1.732</td> </tr> <tr> <td>Left 63-100</td> <td>1.874</td> </tr> <tr> <td>Right 160</td> <td>2.218</td> </tr> <tr> <td>Left 160</td> <td>2.360</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	Right 63-100	1.732	Left 63-100	1.874	Right 160	2.218	Left 160	2.360			
Rating (A)	Weight (kg)														
Right 63-100	1.732														
Left 63-100	1.874														
Right 160	2.218														
Left 160	2.360														
1	51511051														
1	51511052														
1	51521051														
1	51521052														
		Centre feed units IP 55													
		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Weight (kg)</th> </tr> </thead> <tbody> <tr> <td>63-100</td> <td>3.5</td> </tr> <tr> <td>160</td> <td>5.0</td> </tr> </tbody> </table>	Rating (A)	Weight (kg)	63-100	3.5	160	5.0							
Rating (A)	Weight (kg)														
63-100	3.5														
160	5.0														
1	51511151														
1	51521151														