

120W VOLUME CONTROLLER

VOLUME CONTROLLER



DESCRIPTION

NVS-AC10006VC is an elegant and compact volume controller with 24V override function. It's compatible with Norden's wall and ceiling speakers which have 100V line matching transformers and can be connected to a speaker or group of speakers with power rating up to 120 Watts. There are 5 volume selectable positions on the panel. It's your ideal option for installation of hotels, office cabins, showrooms, greenrooms, etc.

FEATURES


- ◉ With override function, fire fighting linkage
- ◉ The power of the volume controller is 120W
- ◉ 5 gear volume adjustment
- ◉ Elegant and compact design

Specifications	
Model	NVS-AC10006VC
Type	Five Gear Volume Control
Rated Power	120W
Override Signal	24V DC 10mA
Gear Output (Input 1KHZ/100V, Load=82Ω, distortion degree<1%)	STEP: 0V(off) STEP 1: 13(±2)V STEP2: 26(±2)V STEP3: 51(±2)V STEP4: 100V
Gear Freq. Response (normal operating conditions (-3DB))	STEP 1: 70Hz~18kHz STEP 2: 70Hz~18kHz, STEP 3: 70Hz~18kHz
Input DC24V override signal output (position switch can be placed at any location)	100V (Input 1KHZ/100V, Load=82Ω, distortion<1%)

NVS-AC10006VC

120W VOLUME CONTROLLER

DIMENSION

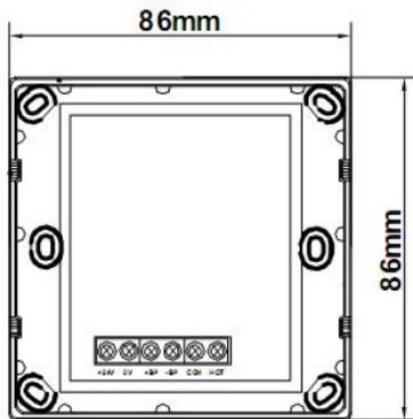

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-AC10006VC	120W VOLUME CONTROLLER	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01