

NVS-10650010WS



## ABS WALL MOUNT SPEAKER 10W

WALL MOUNT SPEAKER



### DESCRIPTION

The NVS-10650010WS is a wall-mounted speaker equipped with an inbuilt transformer, designed for efficient audio transmission over long distances and allowing for the parallel connection of multiple speakers. This makes it an ideal choice for public broadcasting in environments such as schools, malls, offices, train stations, and airports. Constructed from high-quality, eco-friendly ABS material, the speaker is both safe and durable, ensuring long-lasting performance in various commercial settings.


### FEATURES

- ◉ Cost-effective
- ◉ Elegant design
- ◉ Eco-friendly ABS material
- ◉ Easy Installation
- ◉ Ensures broad audio coverage for larger areas


Specifications	
Model	NVS-10650010WS
Rated Power	10W
Driver unit	4.5"×1
Frequency Response	180Hz~15kHz
Power Taping Options	3/6/10W
Input Voltage/Impedance	70V/100V
Sensitivity (1m,1w)	92dB±2dB
Max. SPL (1m)	102dB±2dB
Coverage angle(HxV)	165°x90°
Input Connector	Push in terminal
Operating temperature	-25 °C~+60 °C
Material	ABS Plastic
Weight	0.8kg
Dimensions (H×W×D)	188×228×101mm

# ABS WALL MOUNT SPEAKER 10W


**FREQ. RESPONSE**  
(dB SPL, 1W, 1m)

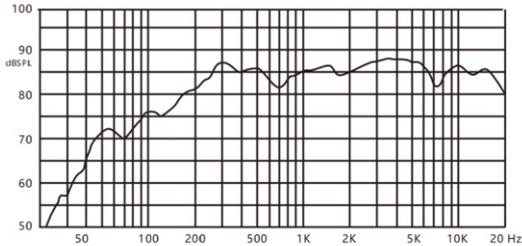

**DISTORTION**  
(THD < 5% 1W, 1m, 100Hz-10kHz)

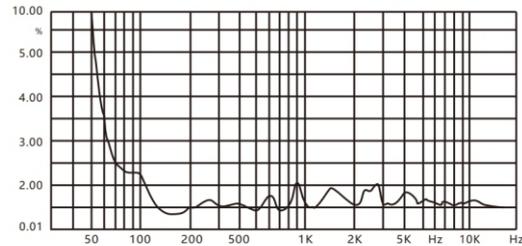


**VERTICAL DIRECTIVITY PATTERN**

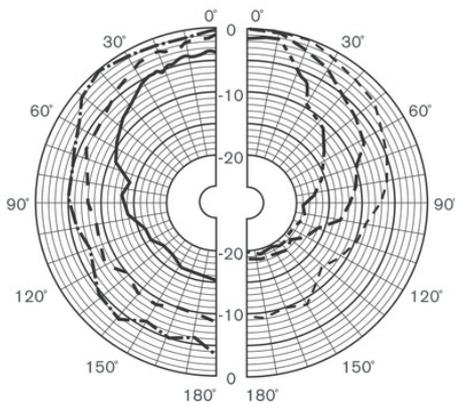


- 250 Hz
- - - 500 Hz
- 1000 Hz
- 2000 Hz
- - - 4000 Hz
- 8000 Hz

**HORIZONTAL DIRECTIVITY PATTERN**

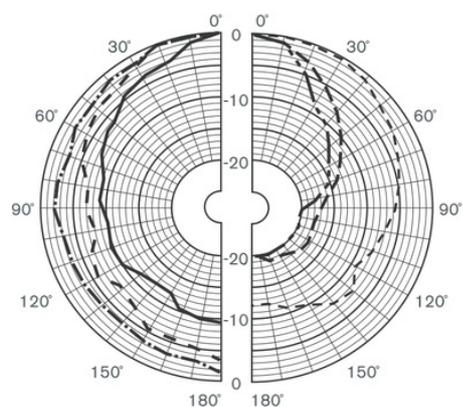

- 250 Hz
- - - 500 Hz
- 1000 Hz
- 2000 Hz
- - - 4000 Hz
- 8000 Hz

## DIMENSION

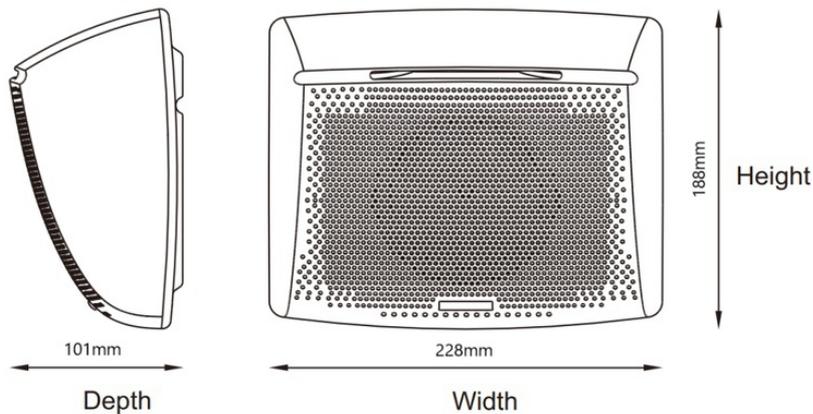

**NVS-10650010WS**



# ABS WALL MOUNT SPEAKER 10W

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10650010WS	ABS WALL MOUNT SPEAKER 10W	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01