

NVS-10400060CS

60W COAXIAL CEILING SPEAKER WITH MULTIPLE POWERTAP OPTION



DESCRIPTION


The NVS-10400060CS is a Ceiling Speaker and it can be switched between the ohms terminal 4-16 Ω and the voltage terminal 70/100V. The built-in 8" speaker driver has a wide frequency response range of 45Hz to 20kHz. It is made of high-quality ABS material, which assure a long-term durability and never out of shape or fading. It is an ideal choice for industrial and commercial applications like hotel, school, office and factory where background music and paging is required.

FEATURES


- ◉ Dual-crossover design
- ◉ High damping
- ◉ Long life ABS material

Specifications	
Model	NVS-10400060CS
Rated Power	60W
Driver Size	8" x1, 1"x1
Frequency Response	45Hz-20kHz
Power Taping Options	15/30/60W
Cutout Size	\varnothing 245mm
Input Voltage/Impedance	70&100V/4-16 Ω
Coverage Angle	150°
Input Connector	Spring loaded terminal
Sensitivity(1m,1w)	92dB \pm 2dB
Maximum SPL(1m)	110dB \pm 2dB
Weight	5.7Kg
Dimension	\varnothing 273 x 270 mm

60W COAXIAL CEILING SPEAKER WITH MULTIPLE POWERTAP OPTION

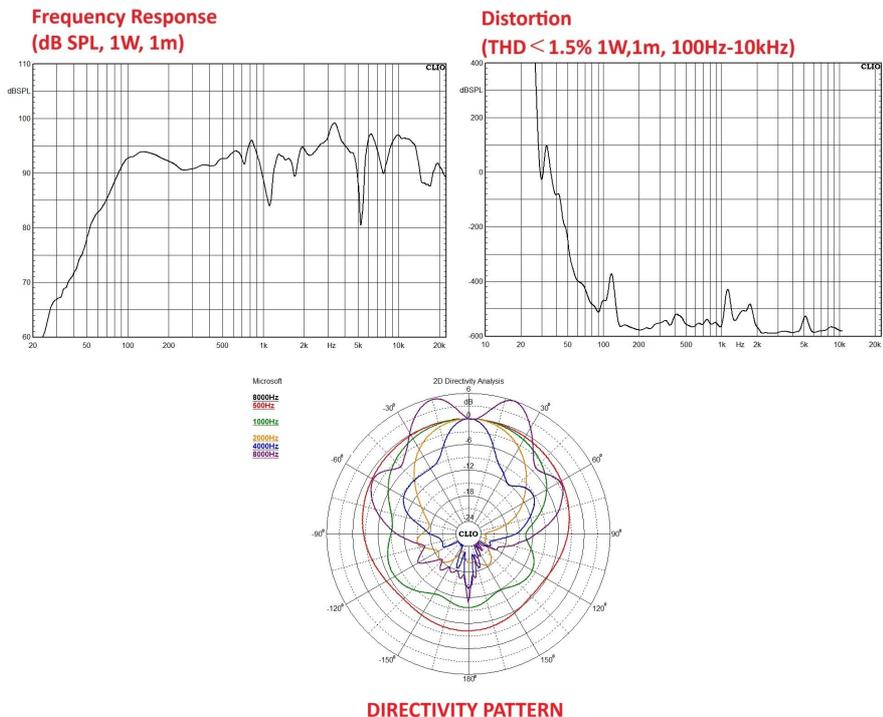

DIMENSION

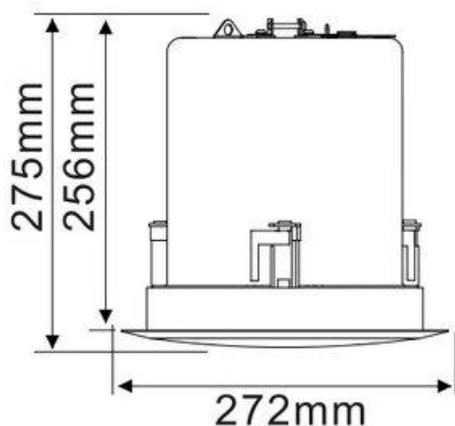

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10400060CS	60W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01