

NVS-10640006WS



ABS WALL MOUNT SPEAKER 6W



WALL MOUNT SPEAKER

DESCRIPTION

The NVS-10640006WS is an ABS Wall Mount Speaker mainly designed for cost effective applications. It's 4.5" driver delivers 6W power output & 180Hz~14kHz Frequency Range. Its streamlined appearance and integrated design allow it to blend in with a variety of decoration styles. It is suitable for schools, offices, supermarkets etc.


FEATURES

- ◉ Cost-effective
- ◉ Streamlined design
- ◉ Built-in audio transformer


Specifications	
Model	NVS-10640006WS
Rated Power	6W
Driver Unit	4.5"×1
Frequency Response	180Hz~15kHz
Power Taping Options	3/6W
Input Voltage/Impedance	70V/100V/8 Ω
Sensitivity (1m,1w)	92dB±2dB
Max SPL(1m)	99dB±2dB
Coverage angle(HxV)	165°x90°
Input Connector	Push in terminal
Operating temperature	-25 °C~+55 °C
Material	ABS Plastic
Weight	0.8kg
Dimensions (H×W×D)	188×228×101mm

ABS WALL MOUNT SPEAKER 6W


FREQ. RESPONSE
(dB SPL, 1W, 1m)

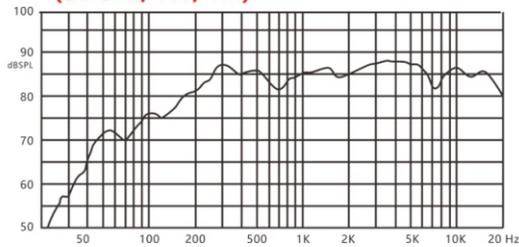

DISTORTION
(THD < 5% 1W, 1m, 100Hz-10kHz)

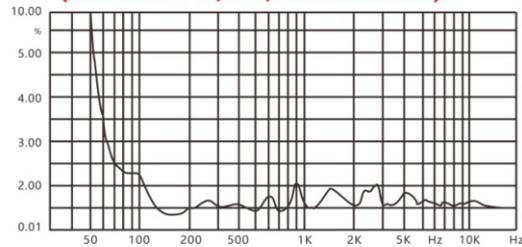


VERTICAL DIRECTIVITY PATTERN

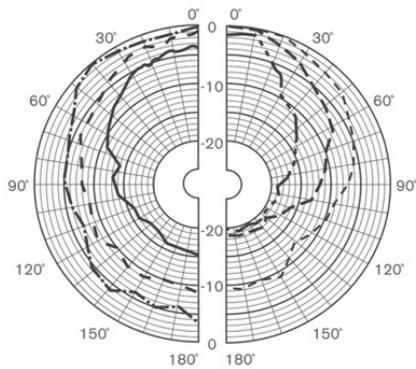


- 250 Hz
- - - 500 Hz
- 1000 Hz
- 2000 Hz
- - - 4000 Hz
- 8000 Hz

HORIZONTAL DIRECTIVITY PATTERN

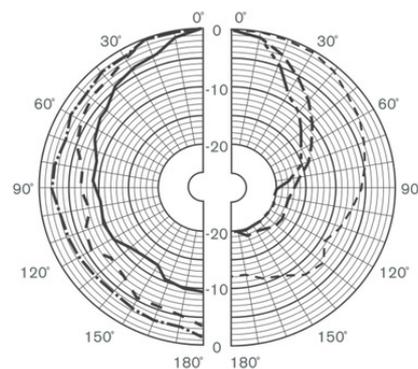

- 250 Hz
- - - 500 Hz
- 1000 Hz
- 2000 Hz
- - - 4000 Hz
- 8000 Hz

DIMENSION

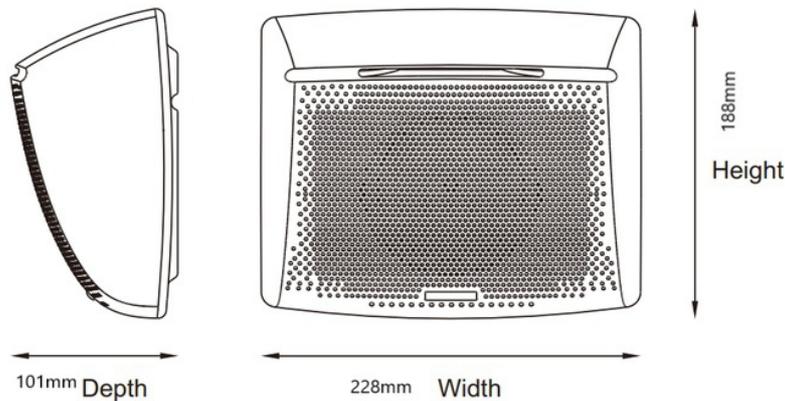

NVS-10640006WS



ABS WALL MOUNT SPEAKER 6W

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10640006WS	ABS WALL MOUNT SPEAKER 6W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01