

NVS-EN15HN

Outdoor Horn Speaker, 15W



DESCRIPTION

The NVS-EN15HN is an outdoor horn loudspeaker designed for voice alarm systems, ideal for paging and speech applications in environments such as schools, offices, hotels, and airports. It is certified with EN54-24 ensuring compliance with fire safety standards. The speaker features a junction box with a ceramic connector, 95°C fire-resistant cable, and thermal fuse for enhanced safety. It offers rated power outputs of 15W, 7.5W, 3.75W, and 1.9W, with an 8 Ohm bypass option. With an IP66 waterproof rating, it is built for durability in outdoor conditions. The speaker includes a line input for 100V or 70V connections via a cable tail, and its ABS enclosure and stainless aluminum bracket are finished in white. A stainless mounting bracket is provided for quick and easy installation.



FEATURES

- ◉ Outdoor horn loudspeaker with transformer for voice alarm system
- ◉ Ideal for paging and speech in schools, offices, hotels, and airports
- ◉ EN54-24 certification
- ◉ Junction box with ceramic connector, 95°C fire-resistant cable, and thermal fuse
- ◉ Rated power output: 15W, 7.5W, 3.75W, 1.9W & 8 Ohm
- ◉ IP66 waterproof rating
- ◉ 100V or 70V line input via cable tail
- ◉ ABS enclosure and white stainless aluminum bracket
- ◉ Quick installation with supplied stainless mounting bracket


Specifications	
Model	NVS-EN15HN
Rated Power Output	15W/7.5W/3.75W/1.9W & 8 Ohm
Line Input	100V or 70V
Frequency Response	400Hz-8KHz
Sensitivity	110dB
Max SPL	121dB
IP Rate	IP66
Connector	By speaker cable tail
Material	ABS enclosure and stainless aluminum bracket in white
Mounting Way	Quick installation by supplied stainless mounting bracket
Dimension	237×175×236mm
Weight	1.4kg

Outdoor Horn Speaker, 15W

Frequency Response & SPL Diagram:

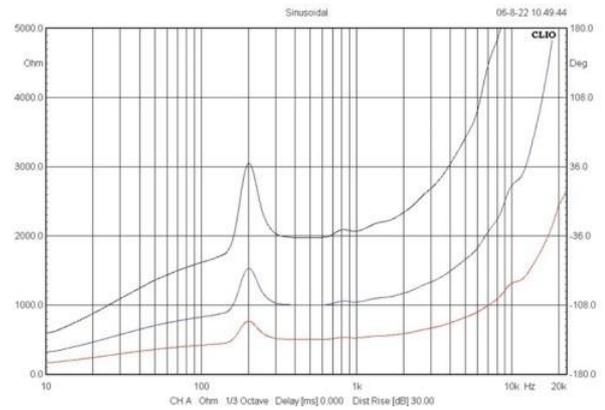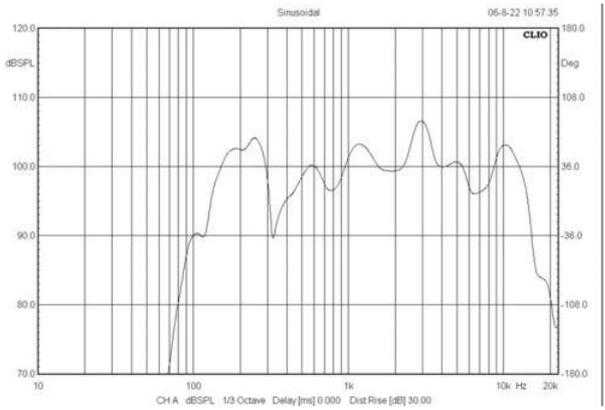

DIMENSION

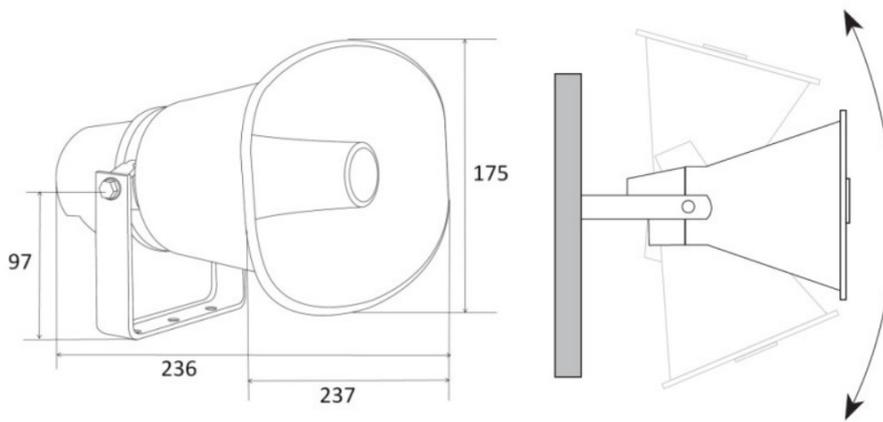

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN15HN	Outdoor Horn Speaker, 15W	01