

Table Embedded Delegate Microphone



DESCRIPTION

The NVS-DC600122CM is a Table Embedded Delegate Microphone. It is an electret cardioid condenser microphone with a gooseneck design and a windshield cover. The device has two color indicators; red indicates speaking, and green indicates applying to speak.

FEATURES

- ⦿ Conforms to IEC 60914 international standard
- ⦿ 3.5mm stereo earphone jack and the volume can be adjustable
- ⦿ Every Mic with unique ID code
- ⦿ With camera tracking function
- ⦿ Support cascaded linkage, T shape linkage or + shape linkage
- ⦿ Connect with voting units via NVS-DC600157JB
- ⦿ Convenient for use
- ⦿ Mic pole detachable
- ⦿ Embedded design
- ⦿ Power supply from the host/extender


Specifications

Model	NVS-DC600122CM
Capsule Type	Electret Cardioid Condenser
Signal to Noise Ratio	>80dB
Sensitivity	-45dBV/pa
Input Impedance	2k Ω
Total Harmonic Distortion	<0.5%
Mic Maximum SPL	125dB (THD<3%)
Earphone Output	9dBu, 8-32 Ω , 3.5mm
Stand-by Power Consumption	<1 W


Table Embedded Delegate Microphone

Maximum Power Consumption	2 W
Working Power	DC 24V
Net Weight	1 Kg
Outer Dimensions (L×W×H)	140×63×75mm
Panel Dimensions (L×W×H)	140×63×6mm
Chassis Dimensions (L×W)	130×45mm

FRONT PANEL

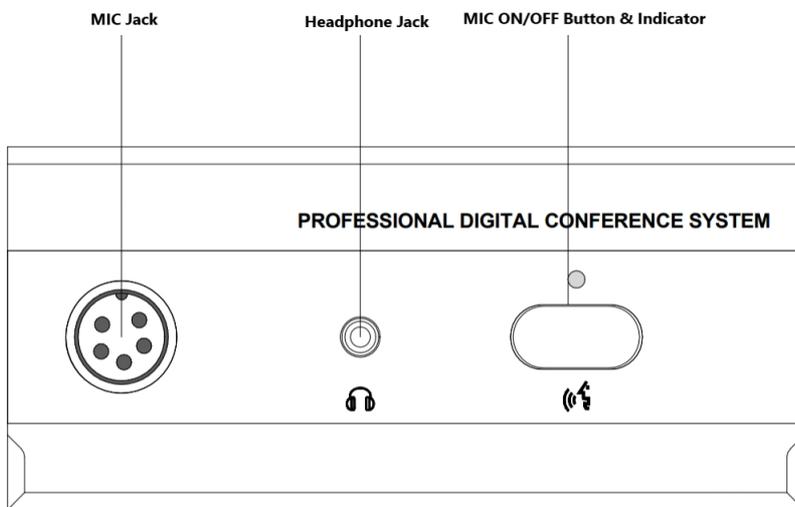

REAR PANEL

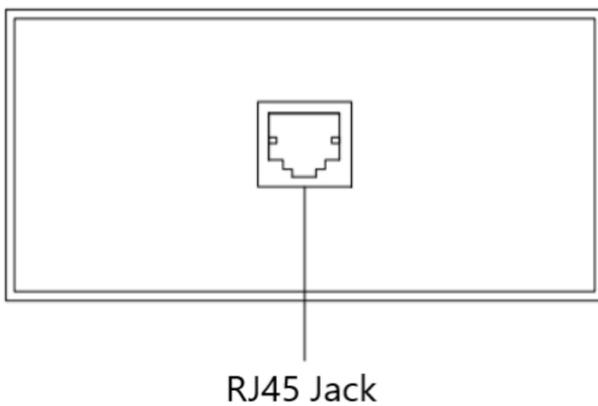

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-DC600122CM	Table Embedded Delegate Microphone	01

Table Embedded Delegate Microphone

ACCESSORIES INFORMATION

Description	Standard Quantity
Cross-shaped Connector	01
8-pin Cable(Male-Female)	01
Cross Recessed Half-round head screw bright black	08
Chassis Accessory	04
Butterfly-shaped Screw	08
Microphone Cap	02